
LR1493 - METAL BAFFLE

4" LOW VOLTAGE TRIMS



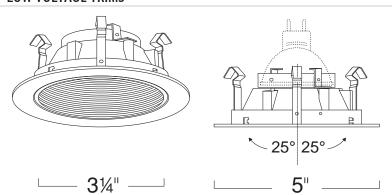

SPECIFICATION

12V/120V 75W MR16

Application: Great for accent and task lighting applications. The 4" baffle trim with its clean and durable die-cast construction provides a smooth illumination in short throw distances

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside

Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural*, All Copper* and All Mocha*.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Natural, Copper and Mocha.

COMPATIBILITY

	I	1
<u>LSH1499R</u>	LH99ICA-GU10	<u>LSH1499</u>
SHALLOW REMODEL Housing	IC HOUSING	SHALLOW HOUSING
LH99A-GU10	<u>LH1499R</u>	<u>LSH1499IC</u>
NEW CONSTRUCTION	REMODEL HOUSING 120V/277V	SHALLOW IC HOUSING
<u> </u>		
LH99RA-GU10	<u>LH1499</u>	<u>LH1499IC</u>
REMODEL	STANDARD HOUSING	IC DOUBLE WALL Housing

Note: Wattage limitations on compatible items must be met.

www.liton.com

FEATURE:











ORDERING EXAMPLE: LR1493W

			2001381			
LR1493	BAF	FLE FINISH	RING	FINISH		ACCESSORIES
LR1493	W	:White	Blank	:White	/L38	:Clear Lens
		:Black		:Black	/L40	:Yellow Lens
	N	:All Natural*	N	:Natural	/L41 /L42	:Blue Lens
	CO	:All Copper* :All Mocha*	CO	:Copper	/L42	:Amber Lens
	MO	:All Mocha*	MO	:Mocha	/L43	:Green Lens
					/L44	:Daylight Blue Lens :Lens with Internal Louver Filter
					/L48	
						:Frosted Soft Focus
					/L50UV	:UltraViolet Filter
					/L53	:Micro - Prismatic Spread Lens
					/L55	:Linear Spread Lens
					/LL16B	:Black
					/LL16C	:Clear

* Comes standard with a matching ring finish. Use "W" for White Ring.

eema

ID#: 230