
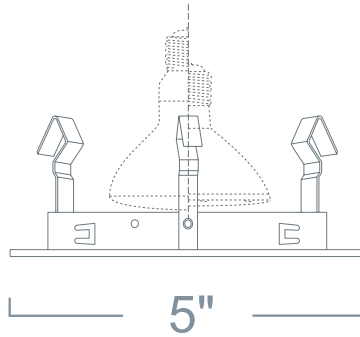


LR922 - ALBALITE TRIM 4" LINE VOLTAGE TRIMS

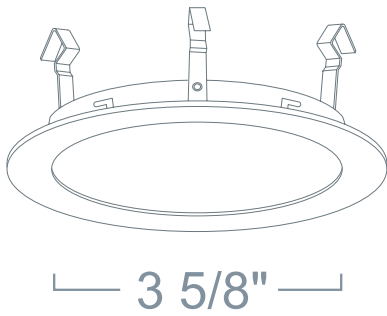

SPECIFICATION

120V/CFL 50W Max R20/PAR20 MED E26

Application: A perfect choice to illuminate a shower or bath. With its small aperture and incandescent light source, these trims produce a strong vibrant light that fully illuminates the shower and bath areas without drawing attention to the source.









Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, White (Plastic), Black, Chrome, Gold, Natural, Copper and Mocha.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LH99R REMODEL E26 HOUSING	 LSH99PR SHALLOW REMODEL CFL HOUSING	 LH99 STANDARD E26 HOUSING
 LH99PR DEEP REMODEL CFL HOUSING	 LH99P DEEP CFL HOUSING	 LH99IC IC DOUBLE WALL E26 HOUSING
 LH99PICA IC AIRTIGHT CFL HOUSING	 LSH99P SHALLOW CFL HOUSING	

Note: Wattage limitations on compatible items must be met.

2016.7.27

FEATURE:



ORDERING EXAMPLE : LR922B-WL

LR922	RING FINISH	RATING
LR922	PW :White (Plastic) W :White B :Black C :Chrome G :Gold N :Natural CO :Copper MO :Mocha	Blank :Damp Location -WL :Wet Location

ID# : 103