
TYPE CATALOG#

LR944 - PHENOLIC BAFFLE NARROW APERTURE

4" LINE VOLTAGE TRIMS



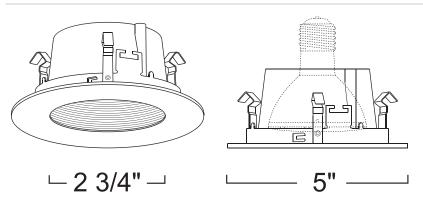

SPECIFICATION

120V/CFL 50W Max PAR20 MED E26

Application: This trim allows a defined location to be lit without affecting the surrounding surfaces while concealing the lamp image and providing a consistent ceiling appearance. The smaller the apperture the more confined the illumination.

Pinhole trims provide the type of precise illumination needed for artwork such as paintings and statues. They are also ideal for cozy environments like restaurants and living spaces where glare-free illumination is desired.

Aside from accent lighting, they can also be utilized for task lighting applications such as above tables, workspace, cabinetry, and other locations where a directed beam is desired.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Molded baffle ridges eliminate stray light. Available in White and Black.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White and Black.

Label: UL Listed, cETL Listed

COMPATIBILITY

© ⊕ management		
LH99R	LSH99PR	<u>LH99P</u>
REMODEL E26 Housing	SHALLOW REMODEL CFL Housing	DEEP CFL HOUSING
	© ○ Possesson	ملياء
<u>LH99</u>	<u>LH99PR</u>	<u>LH991C</u>
STANDARD E26 Housing	DEEP REMODEL CFL Housing	IC DOUBLE WALL E26 Housing
<u>LH99PICA</u>	LSH99P	
IC AIRTIGHT CFL Housing	SHALLOW CFL Housing	

Note: Wattage limitations on compatible items must be met.

FEATURE:







Tel: 323.904.0200





LR944 **BAFFLE FINISH RING FINISH** LR944 :White Blank: White :Black :Black

ORDERING EXAMPLE: LR944W

