


Shallow Remodel Housing w/ Deco Glass Panel

LH1499 SERIES - 4" LOW VOLTAGE RECESSED LIGHTING

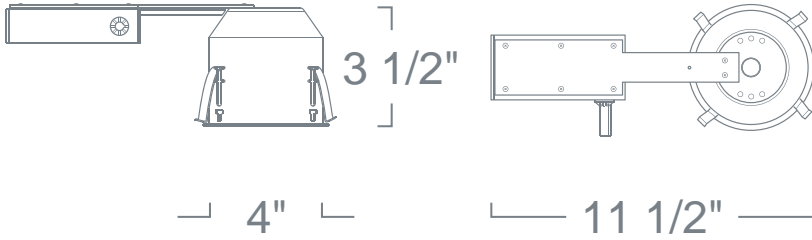

SPECIFICATION

12V Out 37W Max MR16

Ceiling cut-out: 4 1/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheet rock ceiling for fast and easy installation.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: Combines the elements of a clear reflector and the soft, warm glow of light to illuminates walls and ceilings. The **Decorative Glass** trims add elegance to your design and make an architectural statement in any environment.


Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting Steel pressure springs mounted on trim to ensure positive retention inside housing.

Accessories: Takes up to (2) 2" Media.

Label: UL Listed, cETL Listed

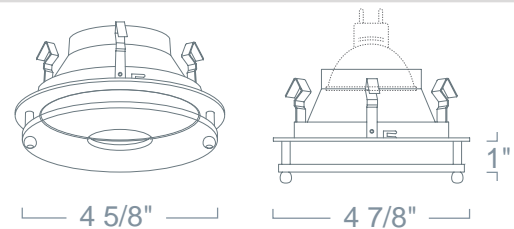

SHALLOW REMODEL HOUSING LSH1499R

RATING	WATTAGE	VOLTAGE	OPTION	ACCESSORIES
LSH1499RE :Electronic	Blank :37W	Blank :120V	Blank :None	/LBL20 :20W Derating
		-27 :277V (Electronic*)		/LBL35 :35W Derating

* Available with 120V/277V Magnetic Option, consult factory.

DECO GLASS PANEL LR1462Z

Ordering example: LSH1499RE/LR1462W

REFLECTOR FINISH	RING FINISH	GLASS	ACCESSORIES
LR1462W :White	Blank :White	Blank :Frosted Lens	/L38 :Clear Lens
LR1462B :Black	B :Black		/L39 :Red Lens
LR1462C :Clear	C :Chrome		/L40 :Yellow Lens
LR1462G :Gold	G :Gold		/L41 :Blue Lens
LR1462CO :All Copper*	N :Natural		/L42 :Amber Lens
LR1462MO :All Mocha*	CO :Copper		/L43 :Green Lens
LR1462S :Satin Haze	MO :Mocha		/L44 :Daylight Blue Lens
			/L48 :Lens with Internal Louver Fit
			/L49 :Frosted Soft Focus
			/L50UV :UltraViolet Filter
			/L53 :Micro - Prismatic Spread Lens
			/L54 :Micro - Prismatic Spread Lens
			/L55 :Linear Spread Lens
			/LL16B :Black
			/LL16C :Clear
			/LL16HD-B :Heavy Duty Black
			/LL16HD-C :Heavy Duty Clear

* Comes standard with a matching ring finish. Use "W" for White Ring.