


## LT740 - PINCH BACK BARNDOOR LOW VOLTAGE TRACK

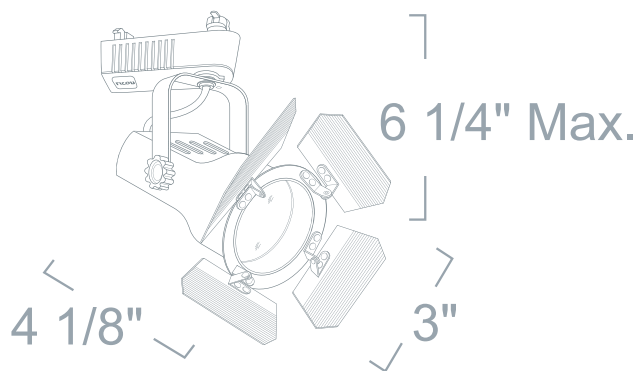

### SPECIFICATION

12V 50W MR16 GU5.3

**Application:** For that high performance theatrical look these fixtures are a perfect fit. Both modern looking and functional, the built-in optical accessories provide excellent cut-off and light control as well as an aesthetic feel to the environment.

**Connector:** Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

**Transformer:** Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

**Aiming Mechanism:** High strength steel yoke to provide full vertical and horizontal aiming. Dual plastic tightening knobs rigidly maintain aiming angle.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Finish:** High heat rated baked enamel Available in White and Black. Custom finishes available with extended lead times – consult factory.

**Accessories:** Takes (1) Media.

**Label:** UL Listed

### COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LT740W

LT740

FINISH

LT740

W :White

B :Black

ID#: 774