


LTSD192 - SLIMTRACK LED FLOOD LIGHT

SLIMTRAK™ LIGHTS

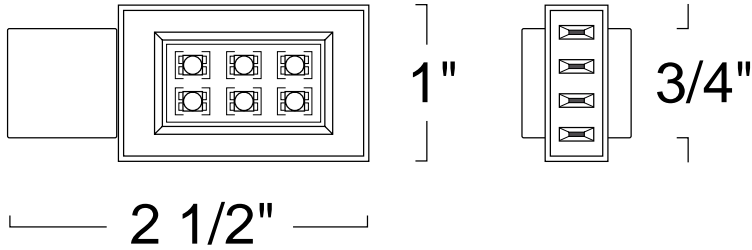

SPECIFICATION

12V 1.5W LED

Application: The SlimTrack collection, features a sleek low-profile design enabling energy efficient lighting designs in retail stores, boutiques and other areas where linear and adjustable illumination is required in compact places.

Aiming: Fully adjustable (358/90 degrees) mounting yoke constructed of solid steel. Provides full vertical aiming. Internal mechanical rigidly maintain vertical aiming angle.

Driver: Electronic Direct Current driver mounted. Comes standard with 12V AC input. Dimmable w/ standard low voltage dimmer.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.





Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 2,700K, 3,500K & 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Finish: Powder coat polyester finish Available in Black and White.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LPS0 SLIMTRAK™ CHANNEL	 LPS802 MONO-POINT CANOPY W/ TRANSFORMER	 LPS9 EXTENSION WAND
 LPS973 MONO-POINT CANOPY		

Note: Wattage limitations on compatible items must be met.

2016.7.26

FEATURE:



ORDERING EXAMPLE : LTSD192W

LTSD192

FINISH

LTSD192

B :Black
W :White

ID#: 2293

