


SP206 - CYLINDRA GLASS PENDANT (LED 9W) SEVILLE GLASS LED PENDANTS

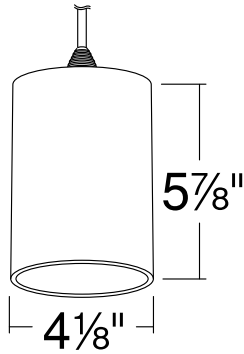

SPECIFICATION

9W CREE LED

Application: Decorative cylindrical glass LED pendant is perfect for introducing beauty, style and intimate illumination to restaurant, hospitality, retail, commercial and high-end residential environments. Warm, lively lumen distribution when turned on, attractive aesthetics when turned off.

Cord: Clear 6' metallic cord is supplied with pendant, field-cutable for custom installations.

Canopy: 4-3/4" x 1-1/8" Canopy mounts to standard junction box. Canopy and hardware feature Satin Nickel finish.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Driver: Electronic Constant Current driver integrally mounted in fixture casing.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Glass Color: Dual layer reinforced glass. Available in Cobalt Blue, Red Lava, Mocha Swirl and Snow Frost.

Driver: Available in 120V ELV Dimming, 12V/0-10V Dimming and 120V/277V Non-Dimming.

Label: UL Listed

LED Details:

9W 500lm

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W PAR20 FL, 50W MR16 FL

Benefit:

- Features long life CREE XLamp LED
- Dimmable using most ELV dimmers
- Usually ships in 1-3 days
- Even illumination lights up entire glass area

2017.8.24

FEATURE:




ORDERING EXAMPLE : SP206-MS

SP206	GLASS COLOR	DRIVER
SP206	-BL :Cobalt Blue	Blank :120V ELV Dimming
	-RD :Red Lava	-12V-D10:12V/0-10V Dimming
	-MS:Mocha Swirl	UE :120V/277V Non-Dimming
	-SF :Snow Frost	

ID#: 2707

SP203 - CYLINDER GLASS PENDANT (LED 9W) SEVILLE GLASS LED PENDANTS

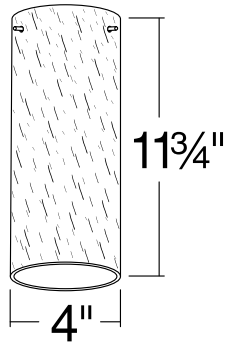

SPECIFICATION

9W CREE LED

Application: Decorative cylindrical glass LED pendant is perfect for introducing beauty, style and intimate illumination to restaurant, hospitality, retail, commercial and high-end residential environments. Warm, lively lumen distribution when turned on, attractive aesthetics when turned off.

Cord: Clear 6' metallic cord is supplied with pendant, field-cutable for custom installations.

Canopy: 4-3/4" x 1-1/8" Canopy mounts to standard junction box. Canopy and hardware feature Satin Nickel finish.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Driver: Electronic Constant Current driver integrally mounted in fixture casing.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Glass Color: Dual layer reinforced glass. Available in Cobalt Blue, Mocha Swirl, Red Lava and Snow Frost.

Driver: Available in 120V ELV Dimming, 12V/0-10V Dimming and 120V/277V Non-Dimming.

Label: UL Listed

LED Details:

9W 500lm

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W PAR20 FL, 50W MR16 FL

Benefit:

- Features long life CREE XLamp LED
- Dimmable using most ELV dimmers
- Usually ships in 1-3 days
- Even illumination lights up entire glass area

2017.8.24

FEATURE:




ORDERING EXAMPLE : SP203-MSUE

SP203	GLASS COLOR	DRIVER
SP203	-BL :Cobalt Blue	Blank :120V ELV Dimming
	-MS :Mocha Swirl	-12V-D10:12V/0-10V Dimming
	-RD :Red Lava	UE :120V/277V Non-Dimming
	-SF :Snow Frost	

ID#: 2729

SP207 - CONO GLASS PENDANT (LED 9W) SEVILLE GLASS LED PENDANTS

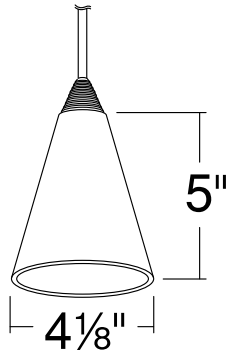

SPECIFICATION

9W CREE LED

Application: Decorative conical glass LED pendant is perfect for introducing beauty, style and intimate illumination to restaurant, hospitality, retail, commercial and high-end residential environments. Warm, lively lumen distribution when turned on, attractive aesthetics when turned off.

Cord: Clear 6' metallic cord is supplied with pendant, field-cutable for custom installations.

Canopy: 4-3/4" x 1-1/8" Canopy mounts to standard junction box. Canopy and hardware feature Satin Nickel finish.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Driver: Electronic Constant Current driver integrally mounted in fixture casing.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Glass Color: Dual layer reinforced glass. Available in Cobalt Blue, Red Lava, Mocha Swirl and Snow Frost.

Driver: Available in 120V ELV Dimming, 12V/0-10V Dimming and 120V/277V Non-Dimming.

Label: UL Listed

LED Details:

9W 500lm

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W PAR20 FL, 50W MR16 FL

Benefit:

- Features long life CREE XLamp LED
- Dimmable using most ELV dimmers
- Usually ships in 1-3 days
- Even illumination lights up entire glass area

2017.8.24

FEATURE:



ORDERING EXAMPLE : SP207-BL

SP207	GLASS COLOR	DRIVER
SP207	-BL :Cobalt Blue	Blank :120V ELV Dimming
	-RD :Red Lava	-12V-D10:12V/0-10V Dimming
	-MS :Mocha Swirl	UE :120V/277V Non-Dimming
	-SF :Snow Frost	

ID#: 2712