


## SP206N - CYLINDRA METALLIC PENDANT (LED 9W) SEVILLE METALLIC LED PENDANTS

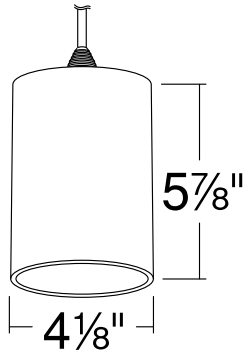

### SPECIFICATION

120V AC 9W CREE LED

**Application:** Decorative cylindrical brushed aluminum LED pendant is perfect for introducing beauty, style and intimate illumination to restaurant, hospitality, retail, commercial and high-end residential environments. Warm, lively lumen distribution when turned on, attractive aesthetics when turned off.

**Cord:** Clear 6' metallic cord is supplied with pendant, field-cutable for custom installations.

**Canopy:** 4-3/4" x 1-1/8" Canopy mounts to standard junction box. Canopy and hardware feature Satin Nickel finish.

**Thermal Management:** Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

**Dimming:** Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

**Driver:** Electronic Constant Current driver integrally mounted in fixture casing.

**Lumen Maintenance:** Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Color Temperature:** Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

**Finish:** Available in Raw Natural Aluminum Shade, Black Shade and White Shade.

**Driver:** Available in 120V ELV Dimming and 120V/277V 0-10V Dimming.

**Label:** cUL Listed

### LED Details:

#### 9W 500 Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W PAR20 FL, 50W MR16 FL

#### Benefit:

- Features long life CREE XLamp LED
- Dimmable using most ELV dimmers
- Usually ships in 1-3 days
- Available in Black and White Shades

2017.5.26

### FEATURE:




ORDERING EXAMPLE : SP206N

SP206N	FINISH	DRIVER
<b>SP206N</b>	<b>Blank</b> :Raw Natural Aluminum Shade	<b>Blank</b> :120V ELV Dimming
	<b>B</b> :Black Shade	<b>-277-D10</b> :120V/277V 0-10V Dimming
	<b>W</b> :White Shade	

ID#: 3179

## SP208N - BELLA METALLIC PENDANT (LED 9W) SEVILLE METALLIC LED PENDANTS

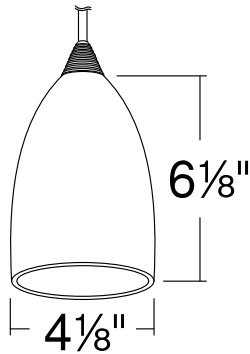

### SPECIFICATION

120V AC 9W CREE LED

**Application:** Decorative bell-shaped brushed aluminum LED pendant is perfect for introducing beauty, style and intimate illumination to restaurant, hospitality, retail, commercial and high-end residential environments. Warm, lively lumen distribution when turned on, attractive aesthetics when turned off.

**Cord:** Clear 6' metallic cord is supplied with pendant, field-cutable for custom installations.

**Canopy:** 4-3/4" x 1-1/8" Canopy mounts to standard junction box. Canopy and hardware feature Satin Nickel finish.

**Thermal Management:** Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

**Dimming:** Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

**Driver:** Electronic Constant Current driver integrally mounted in fixture casing.

**Lumen Maintenance:** Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Color Temperature:** Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

**Finish:** Available in Raw Natural Aluminum Shade, Black Shade and White Shade.

**Driver:** Available in 120V ELV Dimming and 120V/277V 0-10V Dimming.

**Label:** cUL Listed

### LED Details:

#### 9W 500 Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W PAR20 FL, 50W MR16 FL

#### Benefit:

- Features long life CREE XLamp LED
- Dimmable using most ELV dimmers
- Usually ships in 1-3 days
- Available in Black and White Shades

2017.5.26

### FEATURE:



ORDERING EXAMPLE : SP208N

SP208N	FINISH	DRIVER
<b>SP208N</b>	<b>Blank</b> :Raw Natural Aluminum Shade	<b>Blank</b> :120V ELV Dimming
<b>B</b>	:Black Shade	<b>-277-D10</b> :120V/277V 0-10V Dimming
<b>W</b>	:White Shade	

ID#: 3178