



# WS730C : 10" ROUND BULLS-EYE

## CEILING LUMINAIRE - OUTDOOR SURFACE MOUNT

600LM-1500LM (10W/20W)

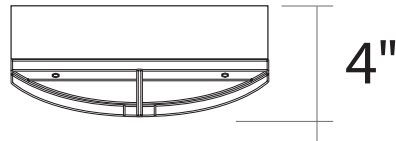

- Glare-Free Soft Diffused Illumination
- Impact Resistant Diffusing Lens
- Tamper Proof Hardware
- 80+ CRI Light Quality
- ADA Compliant
- IP65 Rated

### ORDERING : WS730CB-L06-T30

#### WS730C

Fixture      Finish      Lumens      Control      Color Temperature

Finish	Lumens	Control	Color Temperature
Black <b>B</b>	10W/600lm <b>-L06</b>	120V <b>Blank</b>	3000K <b>-T30</b>
White <b>W<sup>3</sup></b>	20W/1500lm <b>-L15</b>	120V/277V <b>UE</b>	3500K <b>-T35</b>
Silver <b>S<sup>3</sup></b>		0-10 Dimming (120V/277V) <b>UE-D10</b>	4000K <b>-T40</b>
Bronze <b>BZ<sup>3</sup></b>		Remote Emergency Backup <b>UE-EM</b>	5000K <b>-T50</b>
		Casambi Wireless Dimming (120V/277V) <b>-DCSM<sup>1</sup></b>	Color Changing <b>-RGB+W<sup>1</sup></b>
		BubblyNet Wireless System (120V/277V) <b>-DBNT<sup>1</sup></b>	
		SimplySnap Wireless System (120V/277V) <b>-DSYN<sup>2</sup></b>	

<sup>1</sup> Special Order. Consult Factory.

<sup>2</sup> Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.


<sup>3</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

### COMPATABILITY

#### SUN-RMT

Remote Unisense™



# WS730C: 10" ROUND BULLS-EYE

## CEILING LUMINAIRE - OUTDOOR SURFACE MOUNT

### 600LM-1500LM (10W/20W)

## SPECIFICATION

### Application

---

Ceiling Mount Surface Luminaire are ideal for indoor or outdoor applications in residential, commercial, or architectural installations that require the fixture to integrate into the design of the structure. The ceiling mount surface can be used to direct and guide as well as supply lighting for security.

### Housing

---

Constructed from one piece of high grade die cast aluminum with a powder coat finish. Includes an integral wiring compartment and silicone gasket. One (1) power entry hole (1/2-14 NPSM) provided.

### Faceplate

---

A round, cross bar, one-piece, high grade die cast aluminum with a high corrosion-resistant powder coat finish and semi-translucent UV stabilized polycarbonate opal lens. Faceplate is secured to housing by four (4) captive, tamper resistant, stainless steel screws.

### Through Wiring

---

A maximum of four (4) No. 12 AWG conductors (plus ground wire).

### Listing

---

ETL / cETL Listed, suitable for wet locations and for all types of construction, covered ceiling mount. ADA compliant when installed per ADA Requirements. Assembled in USA.

### Electrical

---

AC 50/60Hz Electronic Direct Current Class 2 driver integrally mounted. Power Factor > 0.90. Accessible from above or below ceiling.  
Minimum Operating Temperature: -20°C/-4°F

### Emergency Options

---

Emergency LED Battery Back-Up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch, plate cover and junction box included.

### Lumen Maintenance

---

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results. See ordering guide for delivered lumens.

### Dimming

---

0-10V dimming option (-D10) works with most 5-Wire 0-10V dimmers. Factory qualified for use with Leviton IP710-DLX and Lutron NTFTV-WH.

### Warranty

---


Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship.

# WS730C: 10" ROUND BULLS-EYE CEILING LUMINAIRE - OUTDOOR SURFACE MOUNT 600LM-1500LM (10W/20W)

## SPECIFICATION (Continued)

### Finish

---



Available in Black, White, Silver and Bronze.


### Lumens

---

Available in 10W/ 600lm and 20W/ 1500lm.

### Color Temperature

---



Available in 3000K, 3500K, 4000K, 5000K and Color Changing (Consult Factory).



### LED Details

---

#### 10W 600 Lumen Package

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalent: (1) 26W CFL, 150W A-Lamp

#### 20W 1500 Lumen Package

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalent: (1) 42W CFL, 150W A-Lamp.