


LWMLD4C2311W-T35 (2x1000lm , 40W, 3500K, CRI: 90)

System Power: 21.1W
 Test Date: 2/28/2022
 Beam Angle 50%: 35.2°
 Field Angle 10%: 64.9°
 Color Temperature: 3614
 CRI: 90.3
 R9 Value: 43
 Lumens Delivered: 2038.4
 CBCP: 2176
 Power Factor: 0.98

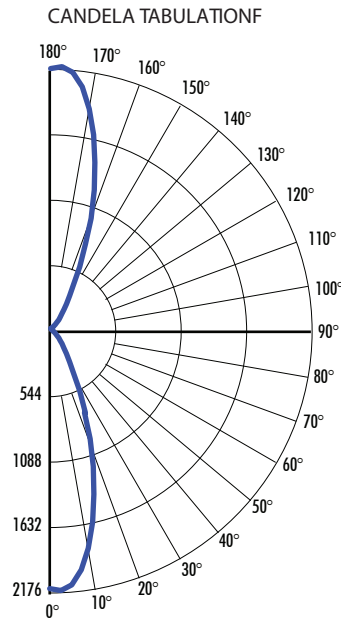


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
24.0'	15.2'	3.8
20.0'	12.7'	5.4
16.0'	10.2'	8.5
12.0'	7.6'	15.1
8.0'	5.1'	34.0
8.0'	5.1'	34.0
12.0'	7.6'	15.1
16.0'	10.2'	8.5
20.0'	12.7'	5.4
24.0'	15.2'	3.8

LWMLD4C2321W-T35 (2x 1800lm , 40W, 3500K, CRI: 90)

System Power: 37.8W
 Test Date: 2/28/2022
 Beam Angle 50%: 30.8°
 Field Angle 10%: 54.5°
 Color Temperature: 3490
 CRI: 91.3
 R9 Value: 48
 Lumens Delivered: 3606.8
 CBCP: 5481
 Power Factor: 0.99

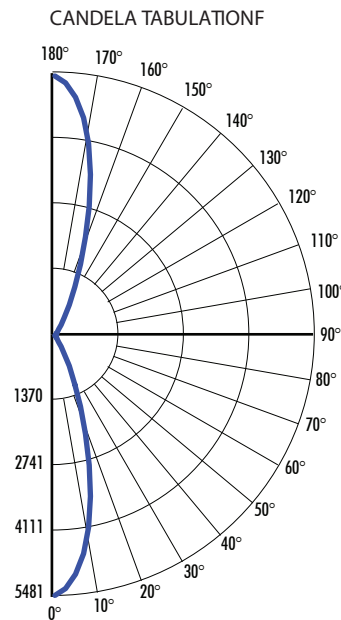

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
36.0'	19.8'	4.2
30.0'	16.5'	6.1
24.0'	13.2'	9.5
18.0'	9.9'	16.9
10.0'	5.5'	54.9
10.0'	5.5'	54.9
18.0'	9.9'	16.9
24.0'	13.2'	9.5
30.0'	16.5'	6.1
36.0'	19.8'	4.2

2022.03.08