


### LWMLD4C310W-TS354 (1000lm, 10W, 3500K, CRI: 90)

System Power: 11.0W  
 Test Date: 02/25/2022  
 Beam Angle 50%: 35.2°  
 Field Angle 10%: 64.9°  
 Color Temperature: 3614  
 CRI: 90.3  
 R9 Value: 43  
 Lumens Delivered: 1019.3  
 CBCP: 2174  
 Power Factor: 0.98

CANDELA TABULATION

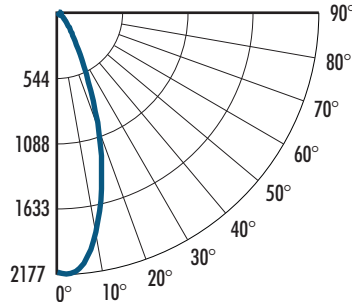


FOOTCANDLE DISTRIBUTION

| Height | Beam Diameter | FC   |
|--------|---------------|------|
| 8.0'   | 5.1'          | 34.0 |
| 12.0'  | 7.6'          | 15.1 |
| 16.0'  | 10.2'         | 8.5  |
| 20.0'  | 12.7'         | 5.4  |
| 24.0'  | 15.2'         | 3.8  |

### LWMLD4321W-TS354 (1800lm, 20W, 3500K, CRI: 90)

System Power: 18.9W  
 Test Date: 02/25/2022  
 Beam Angle 50%: 30.8'  
 Field Angle 10%: 54.5'  
 Color Temperature: 3490  
 CRI: 91.3  
 R9 Value: 48  
 Lumens Delivered: 1803.4  
 CBCP: 5486  
 Power Factor: 0.99

CANDELA TABULATION

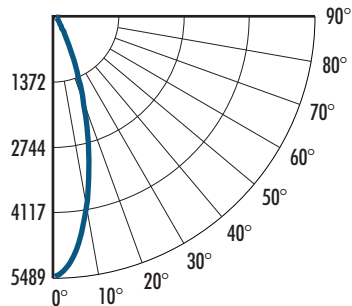


FOOTCANDLE DISTRIBUTION

| Height | Beam Diameter | FC   |
|--------|---------------|------|
| 10.0'  | 5.5'          | 54.9 |
| 18.0'  | 9.9'          | 16.9 |
| 24.0'  | 13.2'         | 9.5  |
| 30.0'  | 16.5'         | 6.1  |
| 36.0'  | 19.8'         | 4.2  |

### LWMLD4C331W-TS354 (2700lm, 28W, 3500K, CRI: 90)

System Power: 27.8W  
 Test Date: 02/25/2022  
 Beam Angle 50%: 30.8'  
 Field Angle 10%: 52.6'  
 Color Temperature: 3491  
 CRI: 90.6  
 R9 Value: 45  
 Lumens Delivered: 2805.6  
 CBCP: 8973  
 Power Factor: 0.98

CANDELA TABULATION

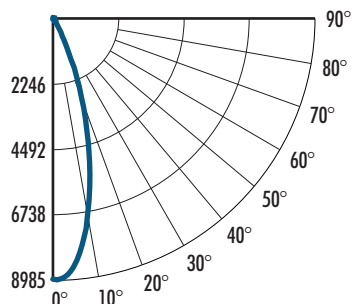


FOOTCANDLE DISTRIBUTION

| Height | Beam Diameter | FC   |
|--------|---------------|------|
| 10.0'  | 5.5'          | 89.7 |
| 16.0'  | 8.8'          | 35.1 |
| 24.0'  | 13.2'         | 15.6 |
| 36.0'  | 19.8'         | 6.9  |
| 48.0'  | 26.4'         | 3.9  |

### LWMLD4C341W-TS354 (3600lm, 40W, 3500K, CRI: 90)

System Power: 36.6W  
 Test Date: 02/25/2022  
 Beam Angle 50%: 37.4'  
 Field Angle 10%: 65.6'  
 Color Temperature: 3467  
 CRI: 90.7  
 R9 Value: 45  
 Lumens Delivered: 3667.1  
 CBCP: 7659  
 Power Factor: 0.99

CANDELA TABULATION

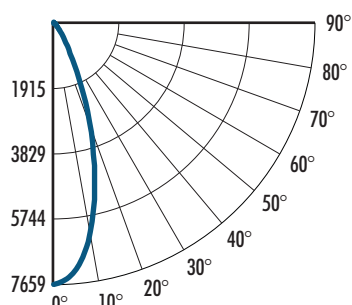

FOOTCANDLE DISTRIBUTION

| Height | Beam Diameter | FC   |
|--------|---------------|------|
| 10.0'  | 6.8'          | 76.6 |
| 16.0'  | 10.8'         | 29.9 |
| 24.0'  | 16.2'         | 13.3 |
| 36.0'  | 24.4'         | 5.9  |
| 48.0'  | 32.5'         | 3.3  |

2022.07.15