



AG350 : LUMENRAY (Medium) IP65 ADJUSTABLE SPOT/FLOOD LIGHT 2000LM - 4500LM (20W - 50W)

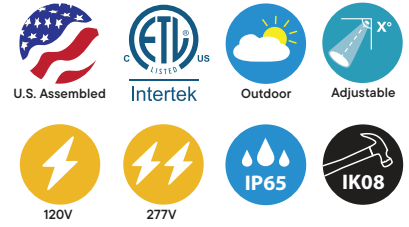

- Simple, stylish industrial design
- Eco-friendly, high-strength ADC12 die-cast aluminum
- Dual-cavity heat sink design improves LED life and durability
- Multiple mounting options for flexible installation
- IP65 Rated
- IK08 option available
- 90 CRI Standard

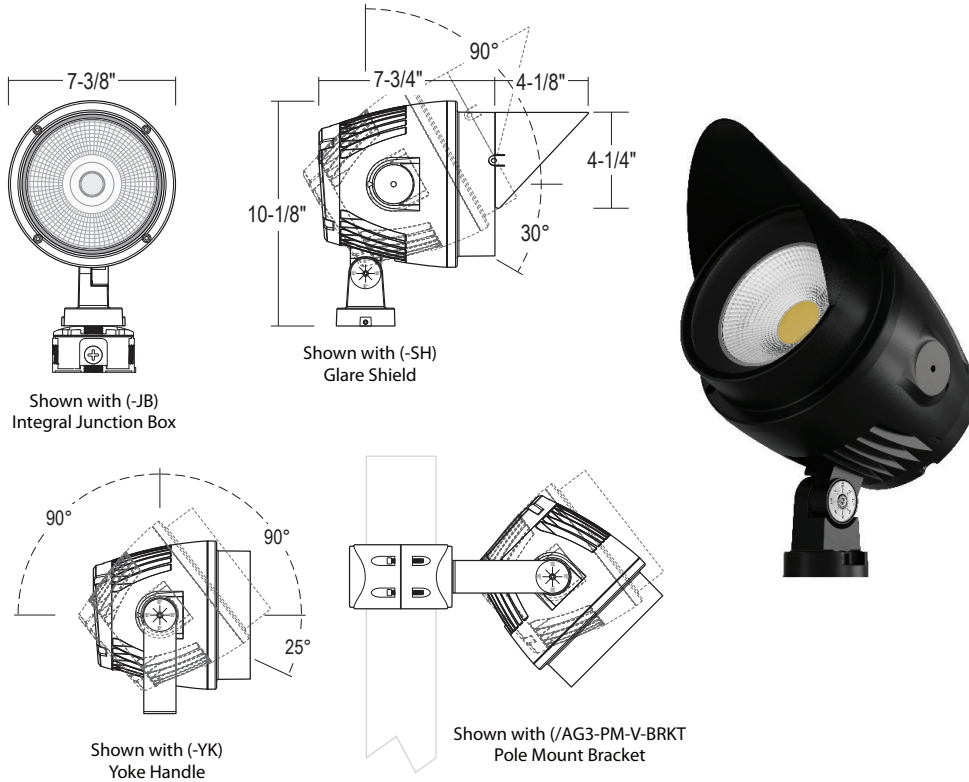

ORDERING : AG350W-L26-B15UE-DUN-T27

[Click for Full Specification Details](#)

Finish	Lumens	Beam Spread	Control	Color Temperature	Mounting	Options	Emergency Options Installations
Finish		Beam Spread		Color Temperature		Options	
Bronze	AG350BZ	10° Pinpoint		-B10 ¹	2700K (90 CRI)	-T27	None
Black	AG350B	15° Narrow Spot		-B15	3000K (90 CRI)	-T30	IK08 Impact Rated
White	AG350W	25° Spot		-B25	3500K (90 CRI)	-T35	Hex-Cell Louver
Silver	AG350S²	40° Flood		-B40	4000K (90 CRI)	-T40	Anti-Glare Lens
					5000K (90 CRI)	-T50	Glare Shield
							Cold Weather
							Marine Grade Finish
Lumens		Control		Mounting		Accessories	
2000lm (20W)	-L20	Non- Dimming (120V)	Blank	Flat Base	Blank	None	Blank
2600lm (28W)	-L26	UniDim™ 0-10V,	UE-DUN	Yoke Handle	-YK¹	Emergency Backpack	/AG3-EMB-FC
3500lm (40W)	-L35	TRIAC/ELV Dimming		Integral Junction Box	-JB	Accessory with Holes	
4500lm (50W)	-L45	(120V/277V)				for Flat Base Mounting	
		SimplySnap Wireless	DSYN¹			Junction Box Backpack	/AG3-EMB-JB
		System (120V/277V)				Accessory with Holes	
						for Flat Base Mounting	
						Vertical Pole Mount	/AG3-PM-V-BRKT^{1,4}
						Bracket (for up to two)	
						Horizontal Pole Mount	/AG3-PM-H-BRKT^{1,4}
						Bracket (for up to two)	

¹ Special Order. Minimum Order. Extended lead time may apply. Consult Factory.
² Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
³ Consult factory for IK08 option with Polycarbonate Lens.
⁴ AG3-PM-BRKT not compatible with -JB, AG3-EMB-FC or AG3-EMB-JB.