


## AG370 : LUMENRAY (Large) IP65 ADJUSTABLE SPOT/FLOOD LIGHT 5000LM - 14,000LM (45W - 110W)

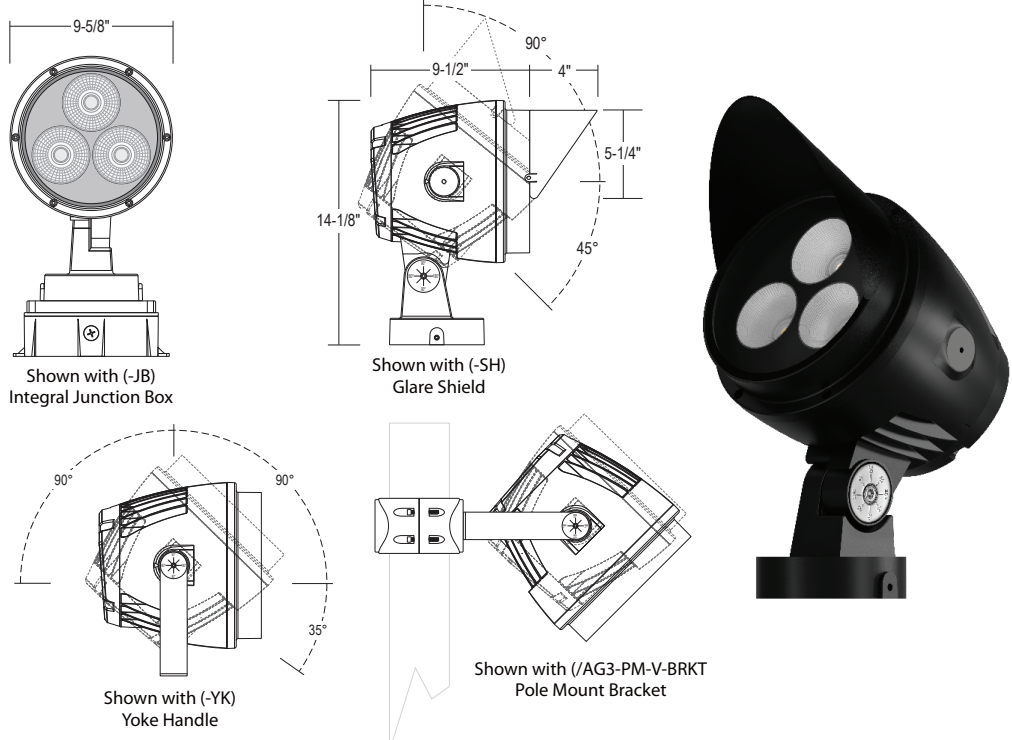

- Simple, stylish industrial design
- Eco-friendly, high-strength ADC12 die-cast aluminum
- Dual-cavity heat sink design improves LED life and durability
- Multiple mounting options for flexible installation
- IP65 Rated
- IK08 option available
- 90 CRI Standard

**ORDERING : AG370W-L075-B15UE-DUN-T27** [Click for Full Specification Details](#)

Finish	Lumens	Beam Spread	Control	Color Temperature	Mounting	Options	Emergency Options Installations
<b>Finish</b>		<b>Beam Spread</b>		<b>Color Temperature</b>		<b>Options</b>	
Bronze	<b>AG370BZ</b>	10° Pinpoint		<b>-B10<sup>1</sup></b>	2700K (90 CRI)	<b>-T27</b>	<b>None</b>
Black	<b>AG370B</b>	15° Narrow Spot		<b>-B15</b>	3000K (90 CRI)	<b>-T30</b>	<b>Blank</b>
White	<b>AG370W</b>	25° Spot		<b>-B25</b>	3500K (90 CRI)	<b>-T35</b>	<b>IK08 Impact Rated</b>
Silver	<b>AG370S<sup>2</sup></b>	40° Flood		<b>-B40</b>	4000K (90 CRI)	<b>-T40</b>	<b>Hex-Cell Louver</b>
					5000K (90 CRI)	<b>-T50</b>	<b>Anti-Glare Lens</b>
					RGB+W Control	<b>-RGBW<sup>5</sup></b>	<b>Glare Shield</b>
							<b>Cold Weather</b>
							<b>Marine Grade Finish</b>
							<b>-SH<sup>1</sup></b>
							<b>-CW<sup>1</sup></b>
							<b>-MGD<sup>2</sup></b>
<b>Lumens</b>		<b>Control</b>		<b>Mounting</b>		<b>Accessories</b>	
5000lm (45W)	<b>-L50</b>	Non- Dimming (120V)		<b>Blank</b>	Flat Base	<b>None</b>	<b>Blank</b>
7500lm (60W)	<b>-L75</b>	0-10V Dimming (120V/277V)		<b>UE-D10</b>	Yoke Handle	Emergency Backpack	<b>/AG3-EMB-FC</b>
10,000lm (80W)	<b>-L100</b>	Casambi Wireless Dimming (120V/277V)		<b>-DCSM</b>	Integral Junction Box	Accessory with Holes for Flat Base Mounting	<b>/AG3-EMB-JB</b>
14,000lm (110W)	<b>-L140</b>					Accessory with Holes for Flat Base Mounting	
RGBW 80lm/W (90W)	<b>-LRGBW</b>					Vertical Pole Mount Bracket (for up to two)	<b>/AG3-PM-V-BRKT<sup>1,4</sup></b>
						Horizontal Pole Mount Bracket (for up to two)	<b>/AG3-PM-H-BRKT<sup>1,4</sup></b>

<sup>1</sup> Special Order. Minimum Order. Extended lead time may apply. Consult Factory.  
<sup>2</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.  
<sup>3</sup> Consult factory for IK08 option with Polycarbonate Lens.  
<sup>4</sup> AG3-PM-BRKT not compatible with -JB, AG3-EMB-FC or AG3-EMB-JB.  
<sup>5</sup> (-RGBW) only compatible with (-LRGBW), (UE-DMX), and (-DCSM).  
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.  
 Fixture Weighs on Average 12 lbs.

2026.03.23