


BL2QZ : LUMENPOLE SQUARE BOLLARD & COLUMN

6" OPEN FRAME - 59", 78", 98", 118" AND 144" HEIGHT
1600LM - 5000LM (20W - 90W)

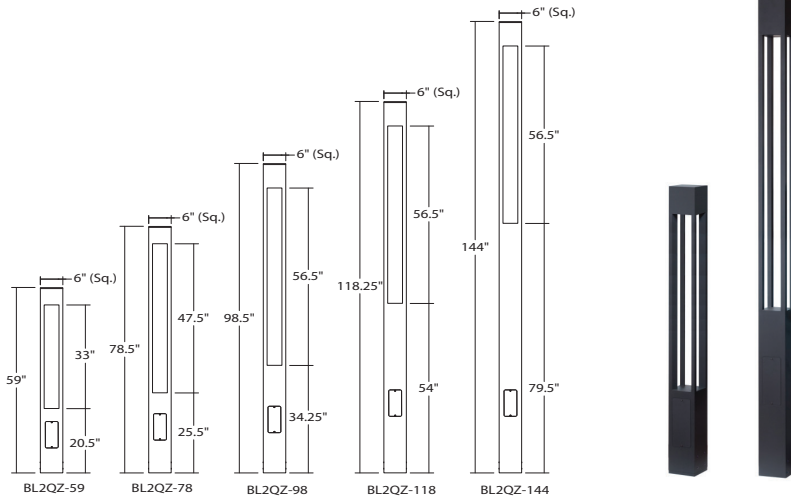

- Dark Sky Compliant
- U.S. Assembled
- Tamper Resistant Hardware
- IK08 Impact Rating
- Integral Emergency Option
- Optional Photocell Sensor
- Quick Ship Options Available
- 90 CRI Standard, 80 CRI on 5000K

ORDERING : BL2QZ-59B-L30-SYM-WUE-D10-T27-C90

[Click for Full Specification Details](#)

BL2QZ

Fixture	Height	Finish	Lumens	Optic	Control	LED	Options
Height		Lumens		Control		LED	
59" Light Column	-59⁶		1600lm (20W)	-L18	Non Dimming (120V)	Blank	2700K (90CRI) -T27-C90
78" Light Column	-78		2000lm (28W)	-L24	TRIAC/ELV Dimming (120V)	-DIN⁹	3000K (90CRI) -T30-C90
98" Light Column	-98		2500lm (42W)	-L30	0-10V Dimming (120/277V)	UE-D10	3000K (97 CRI) -T30-C97¹
118" Light Column	-118		2800lm (48W)	-L34	UniDim™ (120V/277V)	UE-DUN⁸	3500K (90 CRI) -T35-C90
144" Light Column	-144		3500lm (60W)	-L40	0-10V Dimming (347V)	-347-D10⁷	4000K (90 CRI) -T40-C90
			4000lm (70W)	-L50	Dali Dimming (120V/277V)	UE-DLI^{1,3}	5000K (80 CRI) -T50
			4500lm (80W)	-L60	Casambi Wireless Dimming (120V/277V)	-DCSM	Amber Lighting (590nm, Turtle Safe with Louver) -TAM-LVR¹¹
			5000lm (90W)	-L70	BubblyNet Wireless System (120V/277V)	-DBNT¹	Emergency Options
Finish		Optic		Control		Emergency Options	
Black	B	Symmetric	-SYM-EN	SimplySnap Wireless System (120V/277V)	-DSYN^{1,5}	None	Blank
White	W²	Extra Narrow (20°)		UniSense - Integral Motion/Photosensor (120V)	-SUN-INT¹	Remote Full Power Emergency Option	-EMAC^{3,10}
Silver	S²	Symmetric Narrow (45°)	-SYM-N	UniSense - Integral Motion/Photosensor (120V)	-SUN-INT¹	Options	
Bronze	BZ	Symmetric Wide (75°)	-SYM-W	UniSense - Integral Motion/Photosensor (120V/277V)	-SUN-INT-1227¹	None	Blank
		Asymmetric Forward Throw	-ASY-FT¹			Photocell Sensor	-SDL³
		Asymmetric Wide	-ASY-W¹			Surge Protector (120V/277V)	-SRG³

¹ Special order. Minimum Order. Extended lead time may apply. Consult Factory.
² Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
³ Not rated for cold weather. Minimum fixture outdoor temperature, 0°C (32°F).
⁴ Starting Temperature -40°C/-40°F. Only available with (UE-DUN) control option.
⁵ Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.
⁶ (-L40) through (-L70) Lumen option not available on (-59) 59" Height.
⁷ (-347-D10) option only available for Lumen options: (-L18), (-L24) and (-L30).
⁸ (UE-DUN) option only available for Lumen options: (-L18), (-L24), (-L30), and (-L34).
⁹ (-DIN) option only available for Lumen options: (-L18), (-L24), (-L30), (-L34), and (-L70).
¹⁰ (-EMAC) must be ordered with (UE-D10) or (UE-DUN) if ordering with Lumen option (-L30) or higher. Check Wiring Diagram on page 5.
¹¹ (-TAM-LVR) option only available with Lumens (-L18).

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Consult factory for possible additional options including: USB, AC outlet, speaker hubs, wireless, node mounting, PC/Motion sensor, 7-pin photocell receptacle (C136.41 compliant) only w/shorting cap, accepts standard twist-lock photocell or PC/Control Node for wireless dimming control.