TYPE PROJECT

CATALOG#

# BL2R-31/40 : LUMENPOLE ROUND BOLLARD

## 6" FROSTED LENS - 31", AND 40" HEIGHT
## 1200LM / 1500LM (13W / 18W)

Optical Height:
BL2R-31: 19"
BL2R-40: 24"

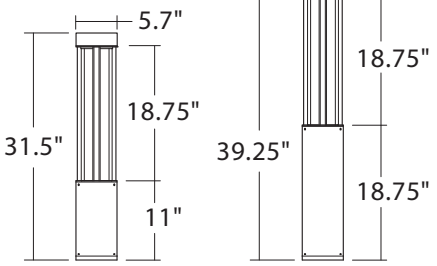


BL2R-31 BL2R-40

US Assembled · IK08 · Cold Weather · IP66 · Quickship

Intertek · Tamper Resistant · Wet · Outdoor · Emergency Backup

120V · 277V · RGBW Option

- U.S. Assembled
- Tamper Resistant Hardware
- IK08 Impact Rating
- RGBW Option
- Integral Emergency Option
- Optional Photocell Sensor
- Quick Ship Options Available

## ORDERING : BL2R-31B-SYM-W-T27-C80

**Click for Full Specification Details**

**BL2R**

| Fixture | Height | Finish | Optic | Control | LED | Emergency Options | Options |
|---|---|---|---|---|---|---|---|

### Height

| | |
|---|---|
| 31" Bollard, 1200lm (13W) | **-31**[1] |
| 40" Bollard, 1500lm (18W) | **-40** |

### Finish

| | |
|---|---|
| Black | **B** |
| White | **W**[2] |
| Silver | **S**[2] |
| Bronze | **BZ** |

### Optic

| | |
|---|---|
| Symmetric Wide (120°) | **-SYM-W** |

### Control

| | |
|---|---|
| UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V) | **Blank** |
| Dali Dimming (120V/277V) | **UE-DLI**[1,3] |
| Casambi Wireless Dimming (120V/277V) | **-DCSM** |
| BubblyNet Wireless System (120V/277V) | **-DBNT**[1] |
| SimplySnap Wireless System (120V/277V) | **-DSYN**[1,6] |
| UniSense - Integral Motion/ Photosensor (120V) | **-SUN-INT**[1,7] |
| UniSense - Integral Motion/ Photosensor (120V/277V) | **-SUN-INT-1227**[1,7] |

### LED

| | |
|---|---|
| 2700K (80 CRI) | **-T27-C80** |
| 3000K (80 CRI) | **-T30-C80** |
| 3500K (80 CRI) | **-T35-C80** |
| 4000K (80 CRI) | **-T40-C80** |
| 5000K (80 CRI) | **-T50-C80** |
| RGB+W Color Changing | **-RGBW**[1,5] |

### Emergency Options

| | |
|---|---|
| None | **Blank** |
| Remote Full Power Emergency Option | **-EMAC**[3] |

### Options

| | |
|---|---|
| None | **Blank** |
| Photocell Sensor | **-SDL**[3] |
| Surge Protector (120V/277V) | **-SRG**[3] |
| Cold Weather | **-CW**[4] |
| Marine Grade Finish | **-MGD** |

[1] Special order. Minimum Order. Extended lead time may apply. Consult Factory.
[2] Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
[3] Not rated for cold weather. Minimum fixture outdoor temperature, 0°C (32°F).
[4] Starting Temperature -40°C/-40°F. Only available with (Blank UniDim™ ) control option.
[5] Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.
[6] Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.
[7] Only Available for (-40) Height Option.

Lumen values only apply to white light not (-RGBW) LED option.
Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.
Consult factory for possible additional options including: USB, AC outlet, speaker hubs, wireless, node mounting, PC/Motion sensor, 7-pin photocell receptacle (C136.41 compliant) only w/shorting cap, accepts standard twist-lock photocell or PC/Control Node for wireless dimming control.

2025.09.03