
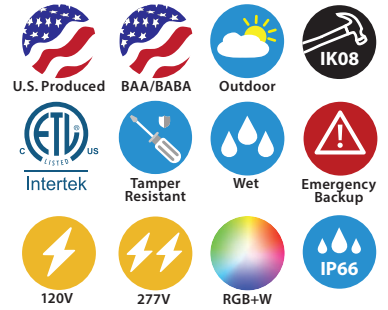


# BL2R-RGBW-USA: LUMENPOLE ROUND BOLLARD & COLUMN

6" FROSTED LENS RGBW - 31", 40", 59", 78", 98", 118" AND 144" HEIGHT  
 800LM-2000LM (20W-53W)

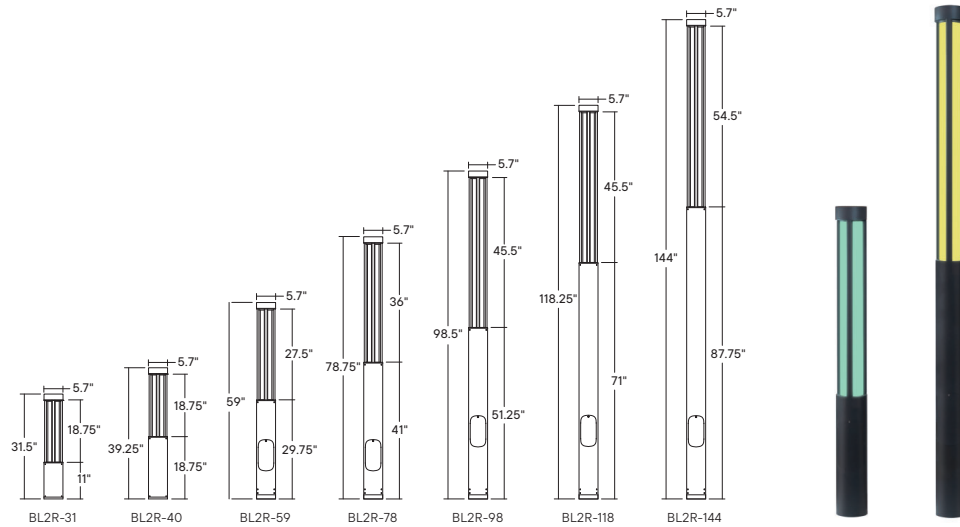

- **Produced in USA**
- Tamper Resistant Hardware
- IK08 Impact Rating
- 10W Emergency Battery Option
- Wireless Bluetooth and DMX 512 Options

ORDERING : BL2R-RGBW-USA-118B-SYM-WUE-D10-EM-RGBW-DMX [Click for Full Specification Details](#)

### BL2R-RGBW-USA<sup>3</sup>

Fixture	Height	Finish	Optic	Control	Emergency Options	Options
<b>Height</b>		<b>Finish</b>		<b>Control</b>		<b>Options</b>
31" Bollard, 800lm (20W)	<b>-31<sup>1</sup></b>	Black		Non-Dimming (120V)	<b>Blank</b>	None
40" Bollard, 800lm (30W)	<b>-40</b>	White		0-10V Dimming (120V/277V)	<b>UE-D10</b>	Wireless Bluetooth
59" Light Column, 1000lm (33W)	<b>-59</b>	Silver				DMX 512 Remote Mounted Decoder
78" Light Column, 1300lm (40W)	<b>-78</b>	Bronze				Marine Grade Finish
98" Light Column, 1500lm (50W)	<b>-98</b>					
118" Light Column, 1700lm (53W)	<b>-118<sup>1</sup></b>					
144" Light Column, 2000lm (53W)	<b>-144<sup>1</sup></b>					
		<b>Optic</b>		<b>Emergency Options</b>		
		Symmetric	<b>-SYM-W</b>	None	<b>Blank</b>	
		Wide (120°)		10W Emergency Battery	<b>-EM</b>	

<sup>1</sup> Special order. Minimum order quantity, extended lead time, and setup fee may apply. Consult factory.

<sup>2</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

<sup>3</sup> Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Consult factory for possible additional options including: USB, AC outlet, speaker hubs, wireless, node mounting, PC/Motion sensor, 7-pin photocell receptacle (C136.41 compliant) only w/shorting cap, accepts standard twist-lock photocell or PC/Control Node for wireless dimming control.