


# BL2R-RGBW: LUMENPOLE ROUND BOLLARD & COLUMN

6" FROSTED LENS RGBW - 31", 40", 59", 78", 98", 118" AND 144" HEIGHT  
 650LM-1700LM (20W-53W)

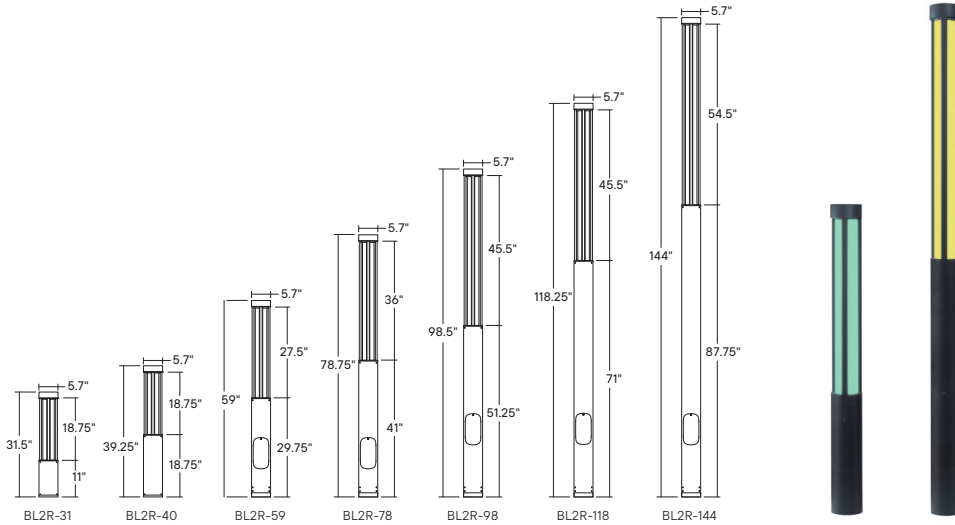

- Up to 53W, 1700lm delivered
- U.S. Assembled
- Tamper Resistant Hardware
- IK08 Impact Rating
- Wireless Bluetooth and DMX 512 Options
- Optional Photocell Sensor
- Quick Ship Options Available

## ORDERING : BL2R-RGBW-118B-RGBW-DMX

[Click for Full Specification Details](#)

### BL2R-RGBW<sup>3</sup>

Fixture	Height	Finish	Optic	Control	Options
<b>Height</b>		<b>Finish</b>	<b>Optic</b>	<b>Control<sup>3</sup></b>	
31" Bollard, 650lm (20W)	<b>-31<sup>1</sup></b>	Black	<b>B</b> Symmetric Wide (120°)	<b>-SYM-W</b> Wireless Bluetooth	<b>-BT<sup>1</sup></b>
40" Bollard, 800lm (30W)	<b>-40</b>	White		DMX 512 Remote Mounted Decoder	<b>-RGBW-DMX</b>
59" Light Column, 1000lm (33W)	<b>-59</b>	Silver		UniSense - Integral Motion/Photosensor (120V)	<b>-SUN-INT</b>
78" Light Column, 1300lm (40W)	<b>-78</b>	Bronze		UniSense - Integral Motion/Photosensor (120V/277V)	<b>-SUN-INT-1227</b>
98" Light Column, 1500lm (50W)	<b>-98</b>			Casambi Wireless Dimming (120V/277V)	<b>-DCSM<sup>1</sup></b>
118" Light Column, 1700lm (53W)	<b>-118<sup>1</sup></b>			BubblyNet Wireless System (120V/277V)	<b>-DBNT<sup>1</sup></b>
144" Light Column, 1700lm (53W)	<b>-144<sup>1</sup></b>			SimplySnap Wireless System (120V/277V)	<b>-DSYN<sup>5</sup></b>
<b>Options</b>					
		None			<b>Blank</b>
		Cold Weather			<b>-CW<sup>4</sup></b>
		Marine Grade Finish			<b>-MGD<sup>1</sup></b>

<sup>1</sup> Special order. Minimum order quantity, extended lead time, and setup fee may apply. Consult factory.

<sup>2</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

<sup>3</sup> Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.

<sup>4</sup> Starting Temperature -30°C/-22°F.

<sup>5</sup> Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Consult factory for possible additional options including: USB, AC outlet, speaker hubs, wireless, node mounting, PC/Motion sensor, 7-pin photocell receptacle (C136.41 compliant) only w/shorting cap, accepts standard twist-lock photocell or PC/Control Node for wireless dimming control.