


BL2R : LUMENPOLE ROUND BOLLARD & COLUMN

6" FROSTED LENS - 59", 78", 98", 118", AND 144" HEIGHT
1700LM - 3100LM (20W - 30W)

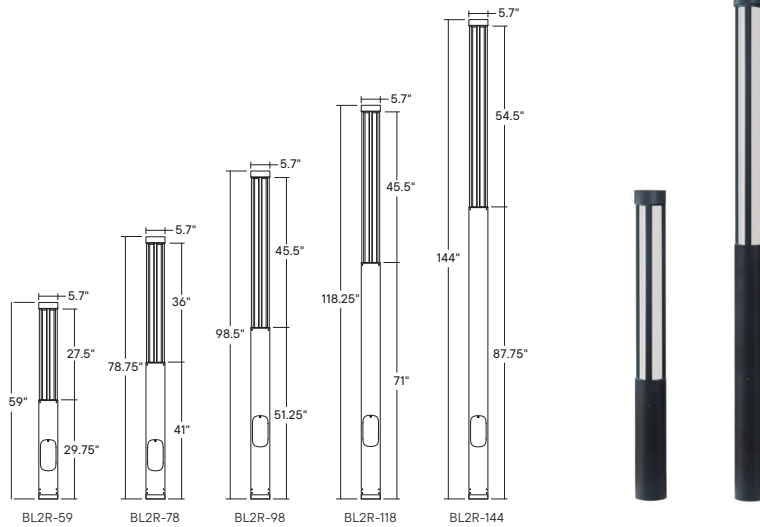

- U.S. Assembled
- Tamper Resistant Hardware
- IK08 Impact Rating
- RGBW Available
- Integral Emergency Option
- Optional Photocell Sensor
- Quick Ship Options Available

ORDERING : BL2R-59B-SYM-W-T27-C80

[Click for Full Specification Details](#)

BL2R		Fixture	Height	Finish	Optic	Control	LED	Emergency Options	Options
Height				Finish		Control		LED	
59" Bollard, 1700lm (20W)	-59	Black	B	UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	Blank	2700K (80 CRI)	-T27-C80		
78" Bollard, 2100lm (25W)	-78	White	W²	Dali Dimming (120V/277V)	UE-DLI^{1,3,7}	3000K (80 CRI)	-T30-C80		
98" Bollard, 2700lm (30W)	-98	Silver	S²	Casambi Wireless Dimming (120V/277V)	-DCSM	3500K (80 CRI)	-T35-C80		
118" Bollard, 3100lm (30W)	-118	Bronze	BZ	BubblyNet Wireless System (120V/277V)	-DBNT¹	4000K (80 CRI)	-T40-C80		
144" Bollard, 3100lm (30W)	-144			SimplySnap Wireless System (120V/277V)	-DSYN^{1,6}	5000K (80 CRI)	-T50-C80		
		Optic		UniSense - Integral Motion/Photosensor (120V)	-SUN-INT¹	RGB+W			
		Symmetric Wide (120°)	-SYM-W	UniSense - Integral Motion/Photosensor (120V/277V)	-SUN-INT-1227¹	Color Changing	-RGBW^{1,5}		
						Emergency Options			
						None	Blank		
						Remote Full Power Emergency Option	-EMAC³		
						Options			
						None	Blank		
						Photocell Sensor	-SDL³		
						Surge Protector (120V/277V)	-SRG³		
						Cold Weather	-CW⁴		
						Marine Grade Finish	-MGD		

¹ Special order. Minimum Order. Extended lead time may apply. Consult Factory.
² Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
³ Not rated for cold weather. Minimum fixture outdoor temperature, 0°C (32°F).
⁴ Starting Temperature -40°C/-40°F. Only available with (Blank UniDim™) control option.
⁵ Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.
⁶ Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.
⁷ UE-DLI not available with (-144) Height option.
 Lumen values only apply to white light not (-RGBW) LED option.
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.
 Consult factory for possible additional options including: USB, AC outlet, speaker hubs, wireless, node mounting, PC/Motion sensor, 7-pin photocell receptacle (C136.41 compliant) only w/shorting cap, accepts standard twist-lock photocell or PC/Control Node for wireless dimming control.

2025.09.03