TYPE PROJECT

CATALOG#

CH4-USA : 4" C·SERIES

LED DOWNLIGHT NEW CONSTRUCTION 1000LM - 3500LM (8W-30W)

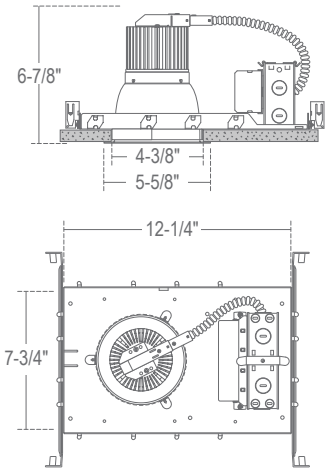

Ceiling Cut-out: 4-7/8"
Ceiling Thickness: 1" Max

U.S. Produced | BAA/BABA | Emergency Backup | IC Rated | Energy Star

Wet | Dedicated LED | Ambient Light | Downlight | Wall Wash

Intertek | 120V | 277V | Damp Location | Motion/Daylight Sensor

• Produced in USA

- Twist and lock reflector for quick access to LED lamp array
- Heavy-duty self-flanged reflector
- Soft even lumen distribution
- No visible screws or hardware

ORDERING : CH4-USA10ICAUE-D10-EM/CR4L17SW-EMA-T30

Click for Full Specification Details

CH4-USAxx / Housing | Insulation Contact | Control | Emergency Options | J-Box | Mounting / Reflector | Reflector Finish | Reflector Options | CCT | Options

Housing[1]			Reflector[1]
1000lm (8W)	**CH4-USA08**	[Options]	**/CR4L17**
1800lm (18W)	**CH4-USA10**	[Options]	**/CR4L17**
2300lm (22W)	**CH4-USA18**	[Options]	**/CR4L17**
2700lm (28W)	**CH4-USA28**	[Options]	**/CR4L17**
3000lm (28W)	**CH4-USA29**	[Options]	**/CR4L30**
3500lm (30W)	**CH4-USA30**	[Options]	**/CR4L30**

Options

Reflector Finish	
Satin Haze Reflector/ White Finish	**SW**
White Reflector/ White Finish	**WW**
All Black	**BB**
Clear Specular Reflector/White Finish	**CW**
All Satin Haze	**SS**

Reflector Options	
None	**Blank**
Integral EM Switch	**-EMA[3]**

CCT	
2700K (80 CRI)	**-T27**
3000K (80 CRI)	**-T30**
3500K (80 CRI)	**-T35**
4000K (80 CRI)	**-T40**
5000K (80 CRI)	**-T50[7]**

Options	
None	**Blank**
4.5" Ceiling Thickness	**-CT4**

Insulation Contact	
Non-IC	**Blank**
IC Rated/ Airtight	**ICA[5]**

Control[2]	
Non-Dimming (120V)	**Blank**
TRIAC/ELV Dimming (120V)	**-DIN**
0-10V Dimming (120V/277V)	**UE-D10**

Emergency Options	
10W Emergency Battery	**EM**

J-Box	
None	**Blank**
Junction Box (Chicago Plenum)	**-CHP**

Mounting	
24" Adjustable	**Blank**
Architectural C-Channel	**-BWNG[4]**

[1] Housing must match corresponding Reflector in column to right.
[2] All drivers are 120V/277V unless otherwise noted.
[3] Only available for EM Housings.
[4] (-BWNG) option does **NOT** include Hanger Bars Hanger Bars ordered separately.
[5] (ICA) is only available on CH4-USA08, CH4-USA10 and CH4-USA18. (CH4-USA28, CH4-USA29 and CH4-USA30 are Non-IC rated.)
[6] (-347-D10) not available for CH4-USA08.
[7] (-T50) not available for CH4-USA29 and CH4-USA30.
[8] Only available with CH4-USA08.

COMPATABILITY



P-CR472
Wall Wash for 4"

VR800
Outdoor Vandal Resistant Kit