



CH6LS : 6" C-SERIES

LUMEN/COLOR SELECT NEW CONSTRUCTION 1900LM - 4900LM (17W-55W)

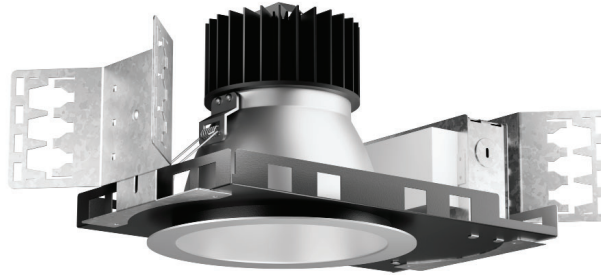

Ceiling Cut-Out: 6-3/8"
 Ceiling Thickness: 1" Max

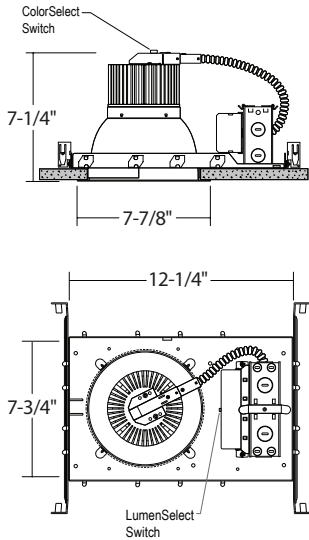

- Three LumenSelect options up to 2800lm, 4500lm, or 4900lm
- ColorSelect 3000K, 3500K, 4000K (84CRI) switch
- Twist and lock reflector for quick access to LED lamp array
- Heavy-duty self-flanged reflector
- Soft even lumen distribution
- No visible screws or hardware

ORDERING : CH6LS1928UE-D10-EM/CR6L22SW-EMA-TS354



[Click for Full Specification Details](#)

CH6LSxxxx		Insulation Contact	Control	Emergency Options	J-Box	Reflector	Reflector Finish	Reflector Options	ColorSelect	Options
LumenSelect Housing ¹										
1900lm (17W)	CH6LS1928 [Options]		Reflector ¹	Reflector Finish		Reflector Option	ColorSelect	Options		
2300lm (22W)			/CR6L22	Satin Haze Reflector/ White Ring	SW	None	Blank	ColorSelect	-TS354	None
2800lm (28W)				White Reflector/ White Ring	WW	Integral EM Switch	-EMA²	3000K, 3500K, 4000K (84 CRI)		4.5" Ceiling Thickness
3100lm (30W)	CH6LS3145 [Options]		/CR6L36	All Black	BB					
3800lm (38W)				Clear Specular Reflector/White Ring	CW					
4500lm (48W)				All Satin Haze	SS					
3600lm (35W)	CH6LS3649 [Options]		/CR6L40							
4200lm (45W)										
4900lm (55W)										

Options

Insulation Contact	Control	Emergency Options	J-Box
Non-IC Blank	0-10V Dimming (120V/277V)	None	None
IC Rated/ Airtight ICA³	Athena Wireless Node (120V)	10W Emergency Battery	Blank
	Athena Wireless Node Occupancy Sensor (120V)	Full Power Emergency Inverter	-EM
	UniSense - Remotely Mounted Motion/Photosensor (120V)	Full Power Emergency Inverter (347V)	-EMAC⁴
	UniSense - Remotely Mounted Motion/Photosensor (120V/277V)	GTD Device	-EMAC347⁴
	Casambi Wireless Dimming (120V/277V)		-GTD
	BubblyNet Wireless System (120V/277V)		
	Lutron Vive Wireless Dimming Module (120V/277V)		

¹ Housing must match corresponding Reflector in column to the right.
² Only available for EM Housings.
³ (ICA) is only available on 1900lm (17W), and 2300lm (22W). (CH6LS1928 2800lm (28W), CH6LS3145, and CH6LS3649 are Non-IC Rated.)
⁴ Check Wiring Diagrams.
⁵ Special Order.
⁶ (-SUN-RMT) Sensor sent with mounting clips for existing ceiling applications.

COMPATABILITY



VR800
 Round Vandal Resistant Ceiling/Wall Kit



P-CR672SW
 Wall Wash for 6"



CR6-GSKT
 6" Commercial Self-Adhesive Gasket