



CH8SHL : 8" C-SERIES

SUPER LOW GLARE, SHALLOW LED NEW CONSTRUCTION
 1100LM - 3000LM (10W-30W)

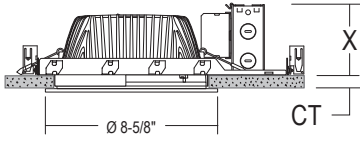

X = 3-7/16" (frame bottom to fixture top)

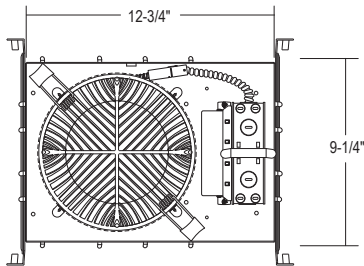

Ceiling Thickness (CT) = 2" (Max.)
 Ceiling Cut-Out: 7-15/16"

- Quickship
- Damp Location
- Wet
- Intertek
- US Assembled
- Ambient Light
- Downlight
- Emergency Backup
- 120V
- 277V
- 347V
- IC Rated
- Motion/Daylight Sensor

- Low glare with 25° visual cutoff and frosted polycarbonate lens
- Shallow 3-7/8" depth for ceilings with minimal plenum air-space
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CH8SHL10UE-D10/CR8SHL30SW-T30



[Click for Full Specification Details](#)

CH8SHL		Control		Emergency Options		J-Box	Reflector Finish	CCT	Options
Lumens	Insulation Contact								
Lumens	Insulation Contact	Control ¹	Emergency Options	J-Box	Reflector Finish	CCT	Options		
1100lm (10W) CH8SHL10	Non-IC Blank	0-10V Dimming	UE-D10	None	Blank	3000K	None		
1500lm (14W) CH8SHL12	ICA Rated/ ICA³	UniDim™ 0-10V, TRIAC/ELV Dimming	UE-DUN	10W Emergency Battery	-EM	3500K	Satin Haze Reflector /White Finish	/CR8SHL30SW	
2000lm (20W) CH8SHL17	Airtight	TRIAC/ELV Dimming (120V)	-DIN	Full Power Emergency Inverter	-EMAC⁴	4000K	White Reflector /White Finish	/CR8SHL30WW	
3000lm (30W) CH8SHL24		Lutron Hi-Lume Lutron EcoSystem 0-10V Dimming (347V)	UE-DHL UE-ECO -347-D10² UE-D10P1	Full Power Emergency Inverter (347V)	-EMAC347⁴		All Black	/CR8SHL30BB²	
		DMX Dimming with input via XLR5 (120V/277V)	UE-DMXLR5	GTD Device	-GTD		All Satin Haze	/CR8SHL30SS²	
		DMX Dimming with input via RJ45 (120V/277V)	UE-DMXRJ45	J-Box					
		Athena Wireless Node (120V)	-AWN	Standard	Blank				
		Athena Wireless Node Occupancy Sensor (120V)	-AWN-OCC	Junction Box (Chicago Plenum)	-CHP				
		UniSense - Remotely Mounted Motion/Photosensor (120V)	-SUN-RMT⁶						
		UniSense - Remotely Mounted Motion/Photosensor	-SUN-RMT-1227⁶						
		Casambi Wireless Dimming	-DCSM⁵						
		BubbyNet Wireless System	-DBNT⁵						
		Lutron Vive Wireless Dimming Module	-VIVE⁵						

¹ All drivers are 120V/277V unless otherwise noted.
² Extended Lead Time. Consult Factory.
³ (ICA) is only available on CH8SHL10, CH8SHL12 & CH8SHL17. (CH8SHL24 are Non-IC rated.)
⁴ Check wiring diagram.
⁵ Special order.
⁶ (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

COMPATABILITY



VR800
 Outdoor Vandal Resistant
 Ceiling/Wall Kit