TYPE PROJECT

CATALOG#

CH9 : 9"/10" C·SERIES

LED DOWNLIGHT NEW CONSTRUCTION 1000LM - 6200LM (9W-50W)

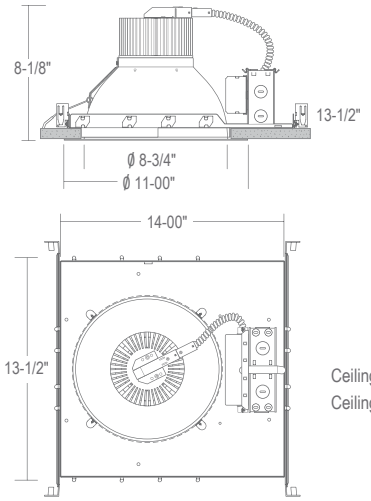

Ceiling Cut-Out: 9-1/4"
Ceiling Thickness: 2-1/2" Max.

Energy Star | Damp Location | Emergency Backup | IC Rated | US Assembled

Wet | Dedicated LED | Ambient Light | Downlight | Wall Wash

Intertek | 120V | 277V | Motion/Daylight Sensor

- Twist and lock reflector for quick access to LED lamp array
- Heavy-duty self-flanged reflector
- Soft even lumen distribution
- No visible screws or hardware

ORDERING : CH910ICAUE-D10-EM-CHP-BWNG/CR9L22SW-EMA-T30

Click for Full Specification Details

CH9xx						/					
Housing	Insulation Contact	Control	Emergency Options	J-Box	Mounting		Reflector	Reflector Finish	Reflector Options	CCT	Options

Housing[1]			Reflector[1]
1000lm (9W)	**CH908**	[Options]	**/CR9L22**
2000lm (17W)	**CH910**	[Options]	**/CR9L22**
2400lm (22W)	**CH915**	[Options]	**/CR9L22**
2900lm (28W)	**CH922**	[Options]	**/CR9L22**
3300lm (32W)	**CH924**	[Options]	**/CR9L36**
3800lm (35W)	**CH929**	[Options]	**/CR9L36**
4100lm (39W)	**CH930**	[Options]	**/CR9L36**
4800lm (48W)	**CH936**	[Options]	**/CR9L36**
5300lm (55W)	**CH940[8]**	[Options]	**/CR9L36**
5600lm (45W)	**CH950**	[Options]	**/CR9L50**
6200lm (50W)	**CH960**	[Options]	**/CR9L60**

Reflector Finish	
Satin Haze Reflector/ White Finish	**SW**
White Reflector/ White Finish	**WW**
All Black	**BB**
Clear Specular Reflector/White FInish	**CW**
All Satin Haze	**SS**

Reflector Options	
None	**Blank**
Integral EM Switch	**-EMA[3]**

CCT	
2700K (84 CRI)	**-T27[9]**
3000K (84 CRI)	**-T30**
3500K (84 CRI)	**-T35**
4000K (84 CRI)	**-T40**
5000K (84 CRI)	**-T50[10]**

Options	
None	**Blank**
4.5" Ceiling Thickness	**-CT4**

Options

Insulation Contact	
Non-IC	**Blank**
IC Rated/ Airtight	**ICA[5]**

Control[2]	
0-10V Dimming	**UE-D10**
UniDim™ 0-10V, TRIAC/ELV Dimming	**UE-DUN**
TRIAC/ELV Dimming (120V)	**-DIN**
Lutron Hi-Lume	**UE-DHL**
Lutron EcoSystem	**UE-ECO**
0-10V Dimming (347V)	**-347-D10[6]**
1%, 0-10V Dimming	**UE-D10P1**
DMX Dimming with input via XLR5 (120V/277V)	**UE-DMXLR5**
DMX Dimming with input via RJ45 (120V/277V)	**UE-DMXRJ45**
Athena Wireless Node (120V)	**-AWN**
Athena Wireless Node Occupancy Sensor (120V)	**-AWN-OCC**
UniSense - Remotely Mounted Motion/Photosensor (120V)	**-SUN-RMT[12]**
UniSense - Remotely Mounted Motion/Photosensor	**-SUN-RMT-1227[12]**
Casambi Wireless Dimming	**-DCSM[11]**
BubblyNet Wireless System	**-DBNT[11]**
Lutron Vive Wireless Dimming Module	**-VIVE[11]**

Emergency Options	
None	**Blank**
10W Emergency Battery	**-EM**
Full Power Emergency Inverter	**-EMAC[7]**
Full Power Emergency Inverter (347V)	**-EMAC347[7]**
GTD Device	**-GTD**

J-Box	
None	**Blank**
Junction Box (Chicago Plenum)	**-CHP**

Mounting	
24" Adjustable	**Blank**
Architectural C-Channel	**-BWNG[4]**

[1] Housing must match corresponding Reflector in column to right.
[2] All drivers are 120V/277V unless otherwise noted.
[3] Only available for EM Housings.
[4] (-BWNG) option does **NOT** include Hanger Bars. Hanger Bars ordered separately.
[5] (ICA) is only available for CH908, CH910 and CH915.
[6] (-347) not available for CH908.
[7] (-EMAC) Check Wiring Diagrams.
[8] CH940/CR9L36 only available with UE-D10, UE-D10P1 and -347-D10 dimming options.
[9] (-T27) Not available for CH960/CR9L60.
[10] (-T50) Not available for CH950/CR9L50 and CH960/CR9L60.
[11] Special Order.
[12] (-SUN-RMT) Sensor sent with mounting clips for existing ceiling applications.

2025.11.07