



## CRTR4LC : 4" C-SERIES

(COB) CHIP ON BOARD BEAM CONTROL LED, RETROFIT/REMODEL  
 1000LM - 2500LM (10W-30W)

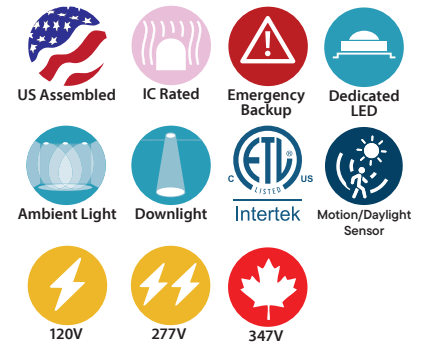

- Heavy-duty seamless die-cast reflector
- Assortment of dimming options
- COB LED design for concentrated high CBCP beam
- Multiple beam spreads for flexible beam control
- Twist and lock reflector for quick access to LED lamp array

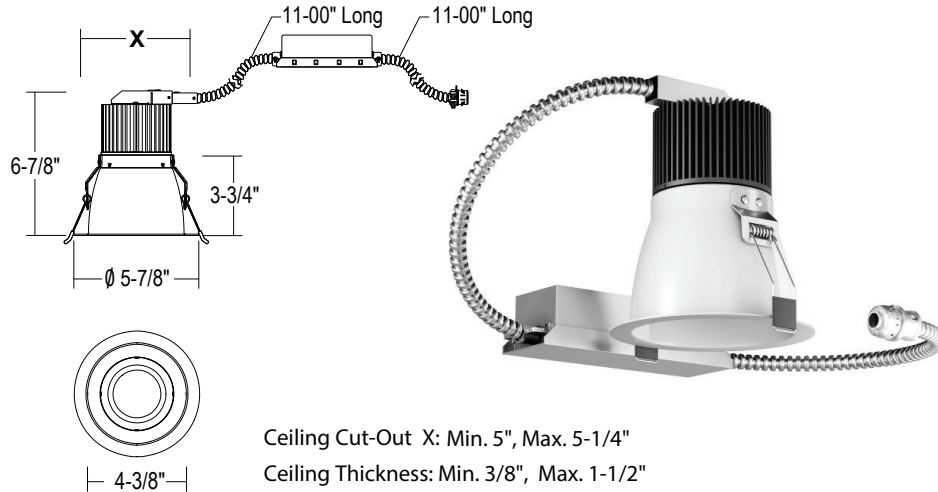

### ORDERING : CRTR4LC10SW-B30-T27UE-D10-JB-CHP

[Click for Full Specification Details](#)

CRTR4LC		Insulation Contact	Reflector Finish	Beam Spread	CCT	Control	Emergency Options	J-Box	Options
Fixture/Lumens									
1000lm (10W)	<b>CRTR4LC10</b>			20° Spot		0-10V Dimming	None		<b>Blank</b>
1400lm (15W)	<b>CRTR4LC15</b>			30° Narrow Flood		UniDim™ 0-10V, TRIAC/ELV Dimming	10W Emergency Battery		<b>-EM</b>
1900lm (20W)	<b>CRTR4LC19</b>			50° Wide Flood		TRIAC/ELV Dimming (120V)	Full Power Emergency Inverter		<b>-EMAC<sup>6</sup></b>
2500lm (30W)	<b>CRTR4LC25</b>			60° Very Wide Flood		Lutron Hi-Lume	Full Power Emergency Inverter (347V)		<b>-EMAC347<sup>6</sup></b>
				70° Very Wide Flood		0-10V Dimming (347V)	GTD Device		<b>-GTD</b>
Insulation Contact									
Non-IC	<b>Blank</b>					1%, 0-10V Dimming			
ICA Rated	<b>ICA<sup>4</sup></b>					0-10V Dimming with 10W Integral Emergency Battery Backup			
Airtight						DMX Dimming with input via XLR5 (120V/277V)		<b>J-Box</b>	
Reflector Finish						DMX Dimming with input via RJ45 (120V/277V)		None	<b>Blank</b>
Satin Haze Reflector/White Ring	<b>SW</b>					0%, DMX Dimming		Junction Box (Chicago Plenum)	<b>-JB</b>
White Reflector/White Ring	<b>WW</b>					Athena Wireless Node (120V)			<b>-JB-CHP</b>
All Black	<b>BB</b>					Athena Wireless Node Occupancy Sensor (120V)		Options	
Clear Specular Reflector/White Ring	<b>CW<sup>3</sup></b>					UniSense - Remotely Mounted Motion/Photosensor (120V)		None	<b>Blank</b>
All Satin Haze	<b>SS</b>					UniSense - Remotely Mounted Motion/Photosensor		4.5" Ceiling Thickness	<b>-CT4</b>
						Casambi Wireless Dimming			
						BubbyNet Wireless System			
						Lutron Vive Wireless Dimming Module			

<sup>1</sup> All drivers are 120V/277V unless otherwise noted.

<sup>2</sup> -347-D10 is not available for CRTR4LC10.

<sup>3</sup> Clear finish reflector not recommended for placing close to vertical surfaces. Uneven striations may be visible.

<sup>4</sup> (ICA) is only available for CRTR4LC10, CRTR4LC15, and CRTR4LC19. (CRTR4LC25 are Non-IC rated.)

<sup>5</sup> UE-D10-EMA is not compatible with -EM or -EMAC or -EMAC347 or -GTD

<sup>6</sup> Check Wiring Diagrams.

<sup>7</sup> Special Order.

<sup>8</sup> (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

### COMPATABILITY

