
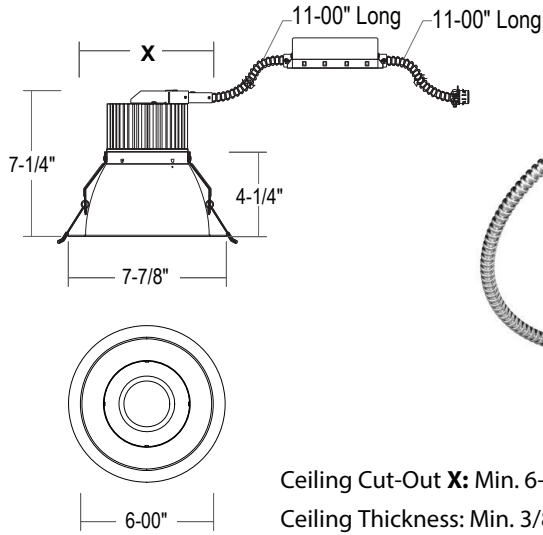


CRTR6L-USA - 6" C-SERIES

LED DOWNLIGHT RETROFIT/REMODEL 1500LM - 2500LM (10W-30W)

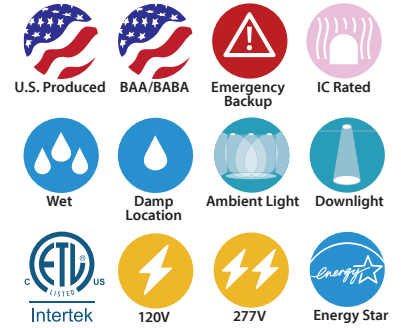

Ceiling Cut-Out **X**: Min. 6-5/8", Max. 7-1/8"
 Ceiling Thickness: Min. 3/8", Max. 1-1/2"

- **Produced in USA**
- 10W Emergency Battery Option
- New junction box option for remodels without frames
- Twist and lock reflector for quick access to LED lamp array
- Heavy-duty self-flanged reflector
- No visible screws or hardware

ORDERING : CRTR6L-USA08ICASWUE-D10-T30

[Click for Full Specification Details](#)

CRTR6L-USAxx

Fixture/Lumens	Insulation Contact	Reflector Finish	Control	CCT	Emergency Options	J-Box	Options																																		
<table border="1"> <thead> <tr> <th>Fixture/Lumens</th> <th>Reflector Finish</th> </tr> </thead> <tbody> <tr> <td>1500lm (10W) CRTR6L-USA08</td> <td>Satin Haze Reflector/ White Ring SW</td> </tr> <tr> <td>1800lm (15W) CRTR6L-USA10</td> <td>White Reflector/ White Ring WW</td> </tr> <tr> <td>2200lm (20W) CRTR6L-USA15</td> <td>All Black BB</td> </tr> <tr> <td>2500lm (30W) CRTR6L-USA22</td> <td>Clear Specular Reflector/White Ring CW</td> </tr> </tbody> </table>	Fixture/Lumens	Reflector Finish	1500lm (10W) CRTR6L-USA08	Satin Haze Reflector/ White Ring SW	1800lm (15W) CRTR6L-USA10	White Reflector/ White Ring WW	2200lm (20W) CRTR6L-USA15	All Black BB	2500lm (30W) CRTR6L-USA22	Clear Specular Reflector/White Ring CW	<table border="1"> <thead> <tr> <th>Insulation Contact</th> <th>Control</th> </tr> </thead> <tbody> <tr> <td>Non-IC Blank</td> <td>Non-Dimming (120V) Blank</td> </tr> <tr> <td>IC Rated/ Airtight ICA¹</td> <td>TRIAC/ELV Dimming (120V) -DIN</td> </tr> <tr> <td></td> <td>0-10V Dimming (120V/277V) UE-D10</td> </tr> </tbody> </table>	Insulation Contact	Control	Non-IC Blank	Non-Dimming (120V) Blank	IC Rated/ Airtight ICA¹	TRIAC/ELV Dimming (120V) -DIN		0-10V Dimming (120V/277V) UE-D10	<table border="1"> <thead> <tr> <th>CCT</th> <th>Emergency Options</th> </tr> </thead> <tbody> <tr> <td>2700K (84 CRI) -T27</td> <td>None Blank</td> </tr> <tr> <td>3000K (84 CRI) -T30</td> <td>10W Emergency Battery -EM</td> </tr> <tr> <td>3500K (84 CRI) -T35</td> <td></td> </tr> <tr> <td>4000K (84 CRI) -T40</td> <td></td> </tr> <tr> <td>5000K (84 CRI) -T50</td> <td></td> </tr> </tbody> </table>	CCT	Emergency Options	2700K (84 CRI) -T27	None Blank	3000K (84 CRI) -T30	10W Emergency Battery -EM	3500K (84 CRI) -T35		4000K (84 CRI) -T40		5000K (84 CRI) -T50		<table border="1"> <thead> <tr> <th>J-Box</th> <th>Options</th> </tr> </thead> <tbody> <tr> <td>None Blank</td> <td>None Blank</td> </tr> <tr> <td>Junction Box -JB</td> <td>4.5" Ceiling Thickness -CT4</td> </tr> <tr> <td>Junction Box (Chicago Plenum) -JB-CHP</td> <td></td> </tr> </tbody> </table>	J-Box	Options	None Blank	None Blank	Junction Box -JB	4.5" Ceiling Thickness -CT4	Junction Box (Chicago Plenum) -JB-CHP	
Fixture/Lumens	Reflector Finish																																								
1500lm (10W) CRTR6L-USA08	Satin Haze Reflector/ White Ring SW																																								
1800lm (15W) CRTR6L-USA10	White Reflector/ White Ring WW																																								
2200lm (20W) CRTR6L-USA15	All Black BB																																								
2500lm (30W) CRTR6L-USA22	Clear Specular Reflector/White Ring CW																																								
Insulation Contact	Control																																								
Non-IC Blank	Non-Dimming (120V) Blank																																								
IC Rated/ Airtight ICA¹	TRIAC/ELV Dimming (120V) -DIN																																								
	0-10V Dimming (120V/277V) UE-D10																																								
CCT	Emergency Options																																								
2700K (84 CRI) -T27	None Blank																																								
3000K (84 CRI) -T30	10W Emergency Battery -EM																																								
3500K (84 CRI) -T35																																									
4000K (84 CRI) -T40																																									
5000K (84 CRI) -T50																																									
J-Box	Options																																								
None Blank	None Blank																																								
Junction Box -JB	4.5" Ceiling Thickness -CT4																																								
Junction Box (Chicago Plenum) -JB-CHP																																									

¹ (ICA) is only available on CRTR6L-USA08, CRTR6L-USA10 and CRTR6L-USA15. (CRTR6L-USA22 are Non-IC Rated.)

COMPATABILITY

VR800
 Outdoor Vandal Resistant
 Ceiling/Wall Kit



P-CR672
 Wall Wash for 6"

