



CRTR6LC : 6" C-SERIES

(COB) CHIP ON BOARD BEAM CONTROL LED, RETROFIT/REMODEL
 1000LM - 4000LM (10W-44W)

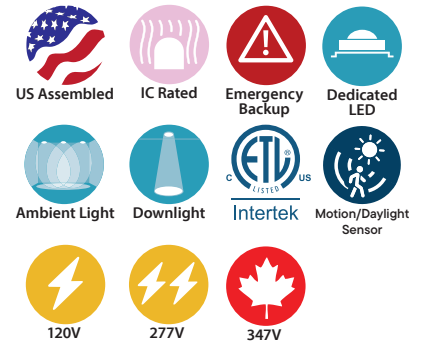

- Heavy-duty seamless die-cast reflector
- Assortment of dimming options
- COB LED design for concentrated high CBCP beam
- Multiple beam spreads for flexible beam control
- Twist and lock reflector for quick access to LED lamp array

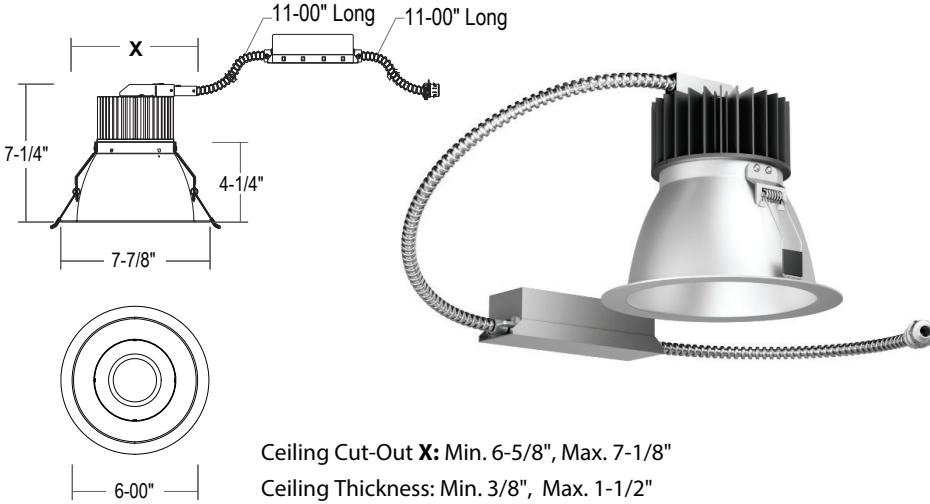

Ceiling Cut-Out X: Min. 6-5/8", Max. 7-1/8"
 Ceiling Thickness: Min. 3/8", Max. 1-1/2"

ORDERING : CRTR6LC10SW-B30-T27UE-D10-JB-CHP

[Click for Full Specification Details](#)

CRTR6LC		Insulation Contact	Reflector Finish	Beam Spread	CCT	Control	Emergency Options	J-Box	Options
Fixture/Lumens									
1000lm (10W)	CRTR6LC10		20° Spot	-B20	0-10V Dimming	UE-D10	None		Blank
1500lm (15W)	CRTR6LC13		30° Narrow Flood	-B30	UniDim™ 0-10V, TRIAC/ELV Dimming	UE-DUN	10W Emergency Battery		-EM
2100lm (20W)	CRTR6LC20		40° Flood	-B40	TRIAC/ELV Dimming (120V)	-DIN	Full Power Emergency Inverter		-EMAC⁶
2800lm (30W)	CRTR6LC26		60° Wide Flood	-B60	Lutron Hi-Lume	UE-DHL	Full Power Emergency Inverter (347V)		-EMAC347⁶
4000lm (44W)	CRTR6LC35		75° Very Wide Flood	-B75	0-10V Dimming (347V)	-347-D10²	GTD Device		-GTD
Insulation Contact		CCT							
Non-IC	Blank	2700K (90 CRI)		-T27	0-10V Dimming with 10W Integral Emergency Battery Backup	UE-D10-EMA⁵			
ICA Rated	ICA⁴	2700K (97 CRI)		-T27-C97	DMX Dimming with input via XLR5	UE-DMXLR5	J-Box		
Airtight		3000K (90 CRI)		-T30	DMX Dimming with input via RJ45	UE-DMXRJ45	None	Blank	
Reflector Finish		3000K (97 CRI)		-T30-C97	0%, DMX Dimming	-DMX	Junction Box	-JB	
Satin Haze Reflector/ White Ring	SW	3500K (90 CRI)		-T35	Athena Wireless Node (120V)	-AWN	Junction Box (Chicago Plenum)	-JB-CHP	
White Reflector/ White Ring	WW	4000K (90 CRI)		-T40	Athena Wireless Node Occupancy Sensor (120V)	-AWN-OCC	Options		
All Black	BB	5000K (80 CRI)		-T50	UniSense - Remotely Mounted Motion/Photosensor (120V)	-SUN-RMT⁸	None	Blank	
Clear Specular Reflector/White Ring	CW³				UniSense - Remotely Mounted Motion/Photosensor	-SUN-RMT-1227⁸	4.5" Ceiling Thickness	-CT4	
All Satin Haze	SS				Casambi Wireless Dimming	-DCSM⁷			
					BubblyNet Wireless System	-DBNT⁷			
					Lutron Vive Wireless Dimming Module	-VIVE⁷			

¹ All drivers are 120V/277V unless otherwise noted.

² -347-D10 is not available for CRTR6LC10.

³ Clear finish reflector not recommended for placing close to vertical surfaces. Uneven striations may be visible.

⁴ (ICA) is only available for CRTR6LC10, CRTR6LC13, CRTR6LC20, and CRTR6LC26. (CRTR6LC35 are Non-IC rated.)

⁵ UE-D10-EMA is not compatible with -EM or -EMAC or -EMAC347 or -GTD

⁶ Check Wiring Diagrams.

⁷ Special Order.

⁸ (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

COMPATABILITY



VR800
 Outdoor Vandal Resistant Ceiling/Wall Kit



P-CR672SW
 Wall Wash for 6"



CR6-GSKT
 6" Commercial Self-Adhesive Gasket