TYPE PROJECT

CATALOG#

CRTR6L : 6" C·SERIES

LED DOWNLIGHT RETROFIT/REMODEL 1000LM - 6000LM (8W-55W)

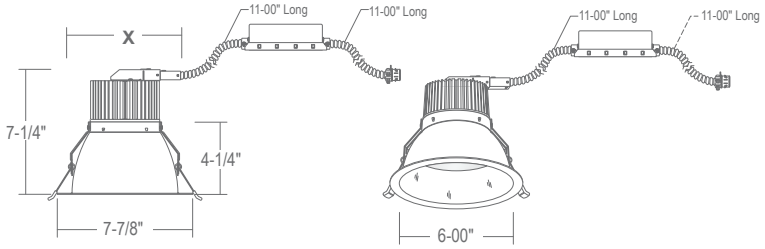

Ceiling Cut-Out **X:** = Min. 6-5/8", Max. 7-1/8", Ceiling Thickness: Min. 3/8", Max. 1-1/2", **for Retrofit with Spring Clip.**

Energy Star · Quickship · Damp Location · Wet

US Assembled · Dedicated LED · Ambient Light · Downlight

120V · 277V · 347V · IC Rated

Emergency Backup · Motion/Daylight Sensor · Intertek

- New junction box option for remodels without frames
- Twist and lock reflector for quick access to LED lamp array
- Heavy-duty self-flanged reflector
- No visible screws or hardware

ORDERING : CRTR6L10SWUE-D10-T30

Click for Full Specification Details

CRTR6L | Fixture/Lumens | Insulation Contact | Reflector Finish | Control | Emergency Options | CCT | J-Box | Options

Fixture/Lumens

1000lm (8W)	**CRTR6L08**
1900lm (17W)	**CRTR6L10**
2300lm (22W)	**CRTR6L15**
2800lm (28W)	**CRTR6L22**
3100lm (30W)	**CRTR6L29**
3800lm (38W)	**CRTR6L30**
4300lm (45W)	**CRTR6L36**
4600lm (45W)	**CRTR6L39**
4900lm (55W)	**CRTR6L40**[7]
5400lm (45W)	**CRTR6L53**
6000lm (50W)	**CRTR6L60**

Insulation Contact

Non-IC	**Blank**
ICA Rated/ Airtight	**ICA**[5]

Reflector Finish

Satin Haze Reflector/ White Ring	**SW**
White Reflector/ White Ring	**WW**
All Black	**BB**
Clear Specular Reflector/White Ring	**CW**
All Satin Haze	**SS**

Control[1]

0-10V Dimming	**UE-D10**
UniDim™ 0-10V, TRIAC/ELV Dimming	**UE-DUN**
TRIAC/ELV Dimming (120V)	**-DIN**
Lutron Hi-Lume	**UE-DHL**
Lutron EcoSystem	**UE-ECO**
0-10V Dimming (347V)	**-347-D10**[6]
1%, 0-10V Dimming	**UE-D10P1**
Dali Dimming	**UE-DLI**
0-10V Dimming with 10W Integral Emergency Battery Backup	**UE-D10-EM**[8]
DMX Dimming with input via XLR5	**UE-DMXLR5**
DMX Dimming with input via RJ45	**UE-DMXRJ45**
Athena Wireless Node (120V)	**-AWN**
Athena Wireless Node Occupancy Sensor (120V)	**-AWN-OCC**
UniSense - Remotely Mounted Motion/Photosensor (120V)	**-SUN-RMT**[4]
UniSense - Remotely Mounted Motion/Photosensor	**-SUN-RMT-1227**[4]
Casambi Wireless Dimming	**-DCSM**[3]
BubblyNet Wireless System	**-DBNT**[3]
Lutron Vive Wireless Dimming Module	**-VIVE**[3]

Emergency Options

None	**Blank**
10W Emergency Battery	**-EM**
Full Power Emergency Inverter	**-EMAC**[2]
Full Power Emergency Inverter (347V)	**-EMAC347**[2]
GTD Device	**-GTD**

CCT

2700K (84 CRI)	**-T27**
3000K (84 CRI)	**-T30**
3500K (84 CRI)	**-T35**
4000K (84 CRI)	**-T40**
5000K (84 CRI)	**-T50**

J-Box

None	**Blank**
Junction Box	**-JB**
Junction Box (Chicago Plenum)	**-JB-CHP**

Options

None	**Blank**
4.5" Ceiling Thickness	**-CT4**

[1] All drivers are 120V/277V unless otherwise noted.
[2] Check wiring diagram.
[3] Special Order.
[4] (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.
[5] (ICA) is only available on CRTR6L08, CRTR6L10 and CRTR6L15.
[6] (-347-D10) not available for CRTR6L08.
[7] CRTR6L40 only available with UE-D10, UE-D10P1 and -347-D10 dimming options.
[8] UE-D10-EMA is not compatible with -EM or -EMAC or -EMAC347 or -GTD

COMPATABILITY

P-CR672
6" Com. Wall Wash Accessory

VR800
Outdoor Vandal Resistant Ceiling/Wall Kit

2025.12.03