


CRTR6SHL : 6" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL AMBER (TURTLE SAFE)
200LM - 250LM (10W - 12W)



Ceiling Cut-out: Min. 6-3/8", Max. 6-5/8"
Ceiling Thickness: Min. 1/4", Max. 2"

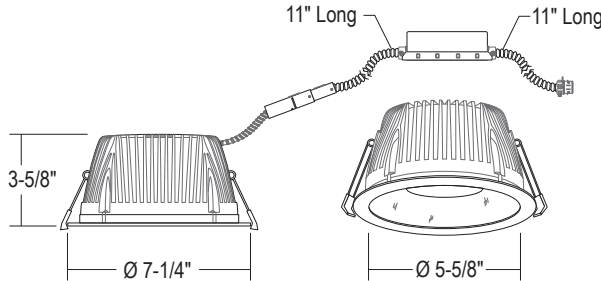

- Quickship
- US Assembled
- Damp Location
- Emergency Backup
- Wet
- Dedicated LED
- Ambient Light
- Downlight
- Intertek
- 120V
- 277V
- 347V
- Turtle Safe

- Deeply recessed lens and 65.5° visual cutoff for reduced glare
- Shallow 3-5/8" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- True Amber (590nm) Non-PC

ORDERING : CRTR6SHL10BBUE-D10-TAM



[Click for Full Specification Details](#)

| CRTR6SHL | | Reflector Finish | Control | Emergency Options | LED | Junction Box |
|-------------------------|-----------------------|------------------|--|-------------------------------|--------------------------------------|-------------------------------|
| Fixture/Lumens | | | | | | |
| 200lm (10W) | CRTR6SHL10 | | 0-10V Dimming | UE-D10 | None | Blank |
| 250lm (12W) | CRTR6SHL12 | | TRIAC/ELV Dimming (120V) | -DIN | 10W Emergency Battery | -EM |
| | | | 0-10V Dimming (347V) | -347-D10 | Full Power Emergency Inverter | -EMAC⁴ |
| Reflector Finish | | | 0-10V Dimming with 10W Integral Emergency Battery Backup | UE-D10-EMA³ | Full Power Emergency Inverter (347V) | -EMAC347⁴ |
| All Black | BB² | | DMX Dimming with input via XLR5 | UE-DMXLR5 | GTD Device | -GTD |
| | | | DMX Dimming with input via RJ45 | UE-DMXRJ45 | LED | |
| | | | | | Amber - Limited Wavelength - 590nm | -TAM |
| | | | | | | None |
| | | | | | | Blank |
| | | | | | | Junction Box |
| | | | | | | Junction Box (Chicago Plenum) |
| | | | | | | Blank |
| | | | | | | -JB |
| | | | | | | -JB-CHP |

¹ All drivers are 120V/277V unless otherwise noted.
² Extended Lead Time. Consult Factory.
³ UE-D10-EMA is not compatible with -EM or -EMAC or EMAC347 or -GTD.
⁴ Check wiring diagram.

COMPATABILITY

