
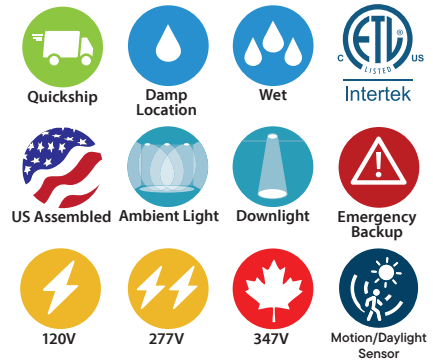


CRTR6SHL : 6" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL
 1000LM - 1800LM (10W-20W)

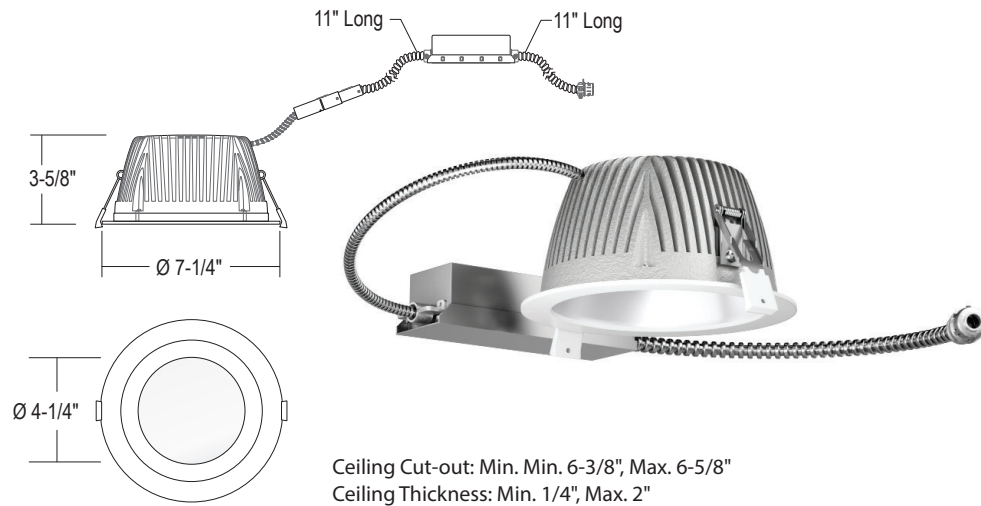

- Deeply recessed lens and 25° visual cutoff for reduced glare
- Shallow 3-5/8" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CRTR6SHL17SWUE-D10-TS30

[Click for Full Specification Details](#)


CRTR6SHL		Insulation Contact	Reflector Finish	Control	CCT	Options	Emergency Options	Junction Box
Fixture/Lumens								
1000lm (10W)	CRTR6SHL10			UE-D10	3000K	-TS30	None	Blank
1300lm (14W)	CRTR6SHL12			UE-DUN	3500K	-TS35	10W Emergency Battery	-EM
1800lm (20W)	CRTR6SHL17			Dimming	4000K	-TS40	Full Power	-EMAC⁴
				TRIAC/ELV Dimming (120V)	ColorSelect	-TS354	Emergency Inverter	
				Lutron Hi-Lume	3000K/3500K		Full Power	-EMAC347⁴
				0-10V Dimming (347V)	/4000K		Emergency Inverter (347V)	
Insulation Contact				UE-DHL²			GTD Device	-GTD
Non-IC	Blank			-347-D10				
ICA Rated	ICA			UE-D10-EMA³	Options			
Airtight				UE-DMXLR5	None	Blank	Junction Box	
				UE-DMXRJ45	Lens for wet locations w/ 60° Beam Spread	-LENS60	None	Blank
Reflector Finish				-AWN	Lens for wet locations w/ 110° Beam Spread	-LENS110	Junction Box	-JB
Satin Haze Reflector/ White Ring	SW			-AWN-OCC			Junction Box (Chicago Plenum)	-JB-CHP
White Reflector/ White Ring	WW			-SUN-RMT⁶				
All Black	BB²			-SUN-RMT-1227⁶				
All Satin Haze	SS²			-DCSM⁵				
				-DBNT⁵				
				-VIVE⁵				

¹ All drivers are 120V/277V unless otherwise noted.
² Extended Lead Time. Consult Factory.
³ UE-D10-EMA is not compatible with -EM or -EMAC or -EMAC347 or -GTD
⁴ Check Wiring Diagrams.
⁵ Special Order.
⁶ (-SUN-RMT) Sensor sent with mounting clips for existing ceiling applications.

COMPATABILITY



VR800
 Outdoor Vandal Resistant
 Ceiling/Wall Kit



P-CR672SW
 Wall Wash for 6"



CR6-GSKT
 6" Commercial
 Self-Adhesive Gasket