TYPE PROJECT

CATALOG#

CRTR8L : 8" C·SERIES

LED DOWNLIGHT RETROFIT/REMODEL 1000LM-6200LM (9W-55W)

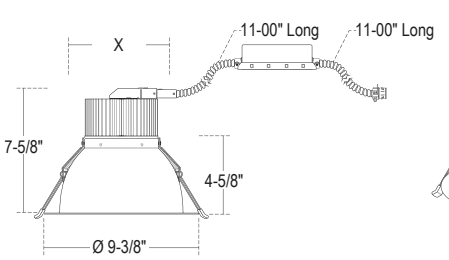

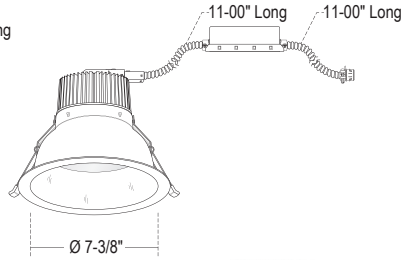

Ceiling Cut-Out X: Min. 7-3/4" Max.8-5/8"
Ceiling Thickness: 2-1/4" Max.

Energy Star | Quickship | Damp Location | Wet

US Assembled | Dedicated LED | Ambient Light | Downlight

120V | 277V | 347V | IC Rated

Emergency Backup | Motion/Daylight Sensor | Intertek

- New junction box option for remodels without frames
- Twist and lock reflector for quick access to LED lamp array
- Heavy-duty self-flanged reflector
- No visible screws or hardware

ORDERING : CRTR8L10SWUE-D10-T30

Click for Full Specification Details

CRTR8L							
Fixture/Lumens	Insulation Contact	Reflector Finish	Control	Emergency Options	CCT	J-Box	Options

Fixture/Lumens

1000lm (9W)	**CRTR8L08**
2000lm (17W)	**CRTR8L10**
2400lm (22W)	**CRTR8L15**
2900lm (28W)	**CRTR8L22**
3300lm (32W)	**CRTR8L24**
3800lm (35W)	**CRTR8L29**
4100lm (39W)	**CRTR8L30**
4800lm (48W)	**CRTR8L36**
5300lm (55W)	**CRTR8L40**[7]
5600lm (45W)	**CRTR8L48**
6200lm (50W)	**CRTR8L60**

Insulation Contact

Non-IC	**Blank**
ICA Rated/ Airtight	**ICA**[5]

Reflector Finish

Satin Haze Reflector/ White Ring	**SW**
White Reflector/ White Ring	**WW**
All Black	**BB**
Clear Specular Reflector/White Ring	**CW**
All Satin Haze	**SS**

Control[1]

0-10V Dimming	**UE-D10**
UniDim™ 0-10V, TRIAC/ELV Dimming	**UE-DUN**
TRIAC/ELV Dimming (120V)	**-DIN**
Lutron Hi-Lume	**UE-DHL**
Lutron EcoSystem	**UE-ECO**
0-10V Dimming (347V)	**-347-D10**[6]
1%, 0-10V Dimming	**UE-D10P1**
0-10V Dimming with 10W Integral Emergency Battery Backup	**UE-D10-EMA**[8]
DMX Dimming with input via XLR5	**UE-DMXLR5**
DMX Dimming with input via RJ45	**UE-DMXRJ45**
Athena Wireless Node (120V)	**-AWN**
Athena Wireless Node Occupancy Sensor (120V)	**-AWN-OCC**
UniSense - Remotely Mounted Motion/Photosensor (120V)	**-SUN-RMT**[4]
UniSense - Remotely Mounted Motion/Photosensor	**-SUN-RMT-1227**[4]
Casambi Wireless Dimming	**-DCSM**[3]
BubblyNet Wireless System	**-DBNT**[3]
Lutron Vive Wireless Dimming Module	**-VIVE**[3]

Emergency Options

None	**Blank**
10W Emergency Battery	**-EM**
Full Power Emergency Inverter	**-EMAC**[2]
Full Power Emergency Inverter (347V)	**-EMAC347**[2]
GTD Device	**-GTD**

CCT

2700K (84 CRI)	**-T27**
3000K (84 CRI)	**-T30**
3500K (84 CRI)	**-T35**
4000K (84 CRI)	**-T40**
5000K (84 CRI)	**-T50**

Options

None	**Blank**
4.5" Ceiling Thickness	**-CT4**

[1] All drivers are 120V/277V unless otherwise noted.
[2] Check wiring diagram.
[3] Special Order.
[4] (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.
[5] (ICA) is only available on CRTR8L08, CRTR8L10 and CRTR8L15.
[6] (-347-D10) not available for CRTR8L08.
[7] CRTR8L40 only available with UE-D10, UE-D10P1 and -347-D10 dimming options.
[8] UE-D10-EM is not compatible with -EM or -EMAC or -EMAC347 or -GTD.

COMPATABILITY

P-CR872
8" Com. Wall Wash Accessory

VR800
Outdoor Vandal Resistant Ceiling/Wall Kit

2025.12.10