



CRTR8SHL : 8" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL
 1100LM - 3000LM (10W-30W)

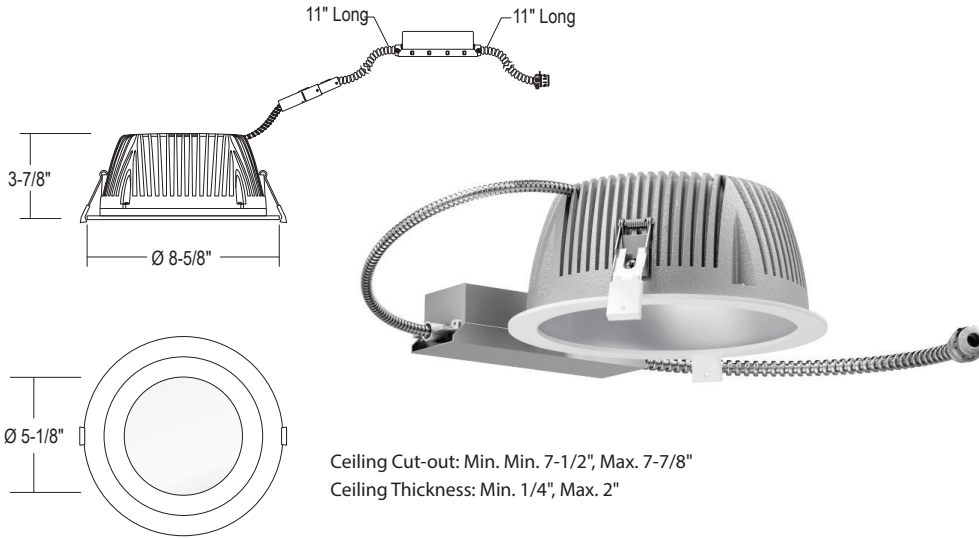

Ceiling Cut-out: Min. 7-1/2", Max. 7-7/8"
 Ceiling Thickness: Min. 1/4", Max. 2"

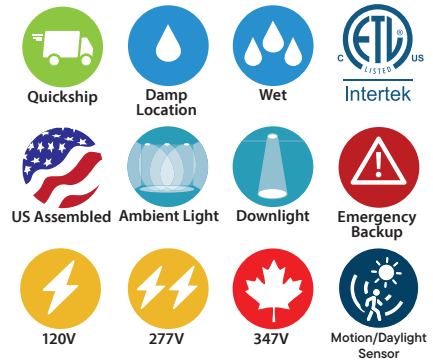

- Deeply recessed lens and 25° visual cutoff for reduced glare
- Shallow 3-7/8" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CRTR8SHL17SWUE-10-T30

[Click for Full Specification Details](#)

CRTR8SHL		Insulation Contact	Reflector Finish	Control	CCT	Options	Emergency Options	Junction Box
Fixture/Lumens								
1100lm (10W)	CRTR8SHL10			0-10V Dimming	3000K		None	Blank
1500lm (14W)	CRTR8SHL12			UniDim™ 0-10V, ELV, Triac Dimming	3500K	-T30	10W Emergency Battery	-EM
2100lm (20W)	CRTR8SHL17			ELV and Triac Dimming (120V)	4000K	-T35	Full Power Emergency Inverter	-EMAC⁵
3000lm (30W)	CRTR8SHL24			Lutron Hi-lume 0-10V Dimming (347V)		-T40	Full Power Emergency Inverter (347V)	-EMAC347⁵
Insulation Contact				10W Emergency Backup	Options	Blank	Emergency Inverter (347V)	
Non-IC	Blank			DMX 0.1% Dimming	None	-LENS60	GTD Device	-GTD
ICA Rated	ICA³			Athena Wireless Node (120V)	Lens for wet locations w/ 60° Beam Spread		Junction Box	
Airtight				Athena Wireless Node Occupancy Sensor (120V)	Lens for wet locations w/ 110° Beam Spread	-LENS110	None	Blank
Reflector Finish				UniSense - Remotely Mounted Motion/Photosensor (120V)			Junction Box	-JB
Satin Haze Reflector/ White Ring	SW			UniSense - Remotely Mounted Motion/Photosensor			Junction Box (Chicago Plenum)	-JB-CHP
White Reflector/ White Ring	WW			Casambi Wireless Dimming				
All Black	BB²			BubblyNet Wireless System				
All Satin Haze	SS²			Lutron Vive Wireless Dimming Module				

¹ All drivers are 120V/277V unless otherwise noted.
² Extended Lead Time. Consult Factory.
³ (ICA) is only available for CRTR68SHL10, CRTR8SHL12, and CRTR8SHL17. (CRTR8SHL24 are Non-IC rated).
⁴ UE-D10-EM is not compatible with -EM or -EMAC or -EMAC347 or -GTD
⁵ Check Wiring Diagrams.
⁶ Special Order.
⁷ (-SUN-RMT) Sensor sent with mounting clips for existing ceiling applications.

COMPATABILITY



VR800
 Outdoor Vandal Resistant
 Ceiling/ Wall Kit



P-CR872SW
 Wall Wash for 8"