


# DL340 : 4" ROUND

CEILING DOWNLIGHT (IP65) 1000LM-1500LM (10W-15W)

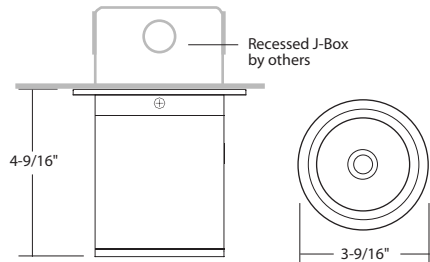

- Energy efficient, low glare LED Chip-On-Board light engine
- Beam spreads include NS, SP, FL, WFL and Pencil Beam
- Wall Wash Optics available
- Emergency back up available
- Integral Surface J-Box Option
- 5-Year Limited Warranty

## ORDERING : DL340B-L15-B02-UE-D10-EMAC-T27-SDL

### DL340

Fixture      Finish      Lumen      Optics      Dimming      Emergency Options      LED      Options

Finish		Optics	Dimming <sup>9</sup>	LED
White (RAL 9003) <b>W</b>		<b>Standard Beams</b>	Non-Dimming (120V) <b>Blank</b>	4000K (90 CRI) <b>Blank</b>
Silver (RAL 7037) <b>S</b>		Wide Flood <b>Blank</b>	ELV and Triac (120V) <b>-DIN</b>	2700K (90 CRI) <b>-T27</b>
Basic Bronze (RAL 8019) <b>BZ</b>		Pencil Beam <b>-B02</b>	0-10V (120V/277V) <b>UE-D10</b>	2700K (97 CRI) <b>-T27-C97<sup>2</sup></b>
Black (RAL 9005) <b>B</b>		Narrow Spot <b>-B10</b>	UniDim™ (120V/277V) <b>UE-DUN</b>	3000K (90 CRI) <b>-T30</b>
Light Silver (RAL 7036) <b>LS<sup>2</sup></b>		Spot <b>-B20</b>	1-10V 1% Dimming (120V/277V) <b>UE-D10P1</b>	3000K (97 CRI) <b>-T30-C97<sup>2</sup></b>
Dark Grey (RAL 7015) <b>DG<sup>2</sup></b>		Flood <b>-B45</b>		3500K (90 CRI) <b>-T35</b>
Metallic Gold (RAL 1001) <b>MG<sup>2</sup></b>		<b>Specialty Beams</b>	<b>Emergency Options</b>	5000K (80 CRI) <b>-T50</b>
Metallic Black (RAL 7021) <b>MB<sup>2</sup></b>		Wall Wash <b>-WW</b>	None <b>Blank</b>	RGB+W Control (24VDC) <b>-RGBWV24<sup>4</sup></b>
		Asymmetric (110° x 40°) <b>-B0160</b>	Remote Location Emergency System <b>-EMAC</b>	<b>Options</b>
<b>Lumen</b>			Emergency in Canopy for Surface Mounted Fixture <b>-EMA<sup>1,6,7</sup></b>	None <b>Blank</b>
1000lm (10W) <b>Blank</b>			Emergency in Canopy for Pendant Mounted Fixture <b>-EMA/PM<sup>1,6,7,8</sup></b>	Hex-Cell Louver <b>-LVR</b>
1500lm (15W) <b>-L15</b>				Photocell Sensor <b>-SDL</b>
				Integral Junction Box 1-Outlet <b>-JB<sup>5</sup></b>
				Surge Protector <b>-SRG</b>
				Cold Weather <b>-CW<sup>3,7</sup></b>
				Frosted Lens <b>-FR</b>

<sup>1</sup> -EMA and -EMA/PM for 15W max.

<sup>2</sup> Special Order. Minimum order, extended lead time may apply. Consult factory. (Finish options 50 piece minimum. 10-12 week lead time).

<sup>3</sup> Starting temperature -30°C/-22°F; see p. 7.

<sup>4</sup> Available with wireless bluetooth or DMX control. Consult factory for details. Remote power supplies and control gear may be required.

<sup>5</sup> See p. 5 for breakdown of -JB options.

<sup>6</sup> Standard option only available for Black (B), and White (W) finish. For alternate finishes; contact factory for pricing. Extended lead time may apply.

<sup>7</sup> (-EMA) and (-EMA/PM) are not compatible with (-CW) option.

<sup>8</sup> Must be ordered with Cable Mount (LPCMDL) or Pendant Mount Accessory (LPCMDL4) shown on p. 6.

<sup>9</sup> 347V Input with 0-10V Dimming available. Consult factory for lead times.

(Click for more Information)



[View Full Detailed Specification Sheet](#)