


DL4P3 : CYLO CYLINDER

CANOPY MOUNT PENDANT 1000LM - 3600LM (10W - 36W)



- High power pendant mount up to 3600lm (36W)
- Internally mounted LED driver
- Available in 3000K, 3500K, 4000K, and ColorSelect
- Zero percent dimming standard, smoothly dims to off with incandescent dimmers
- 90 CRI Standard

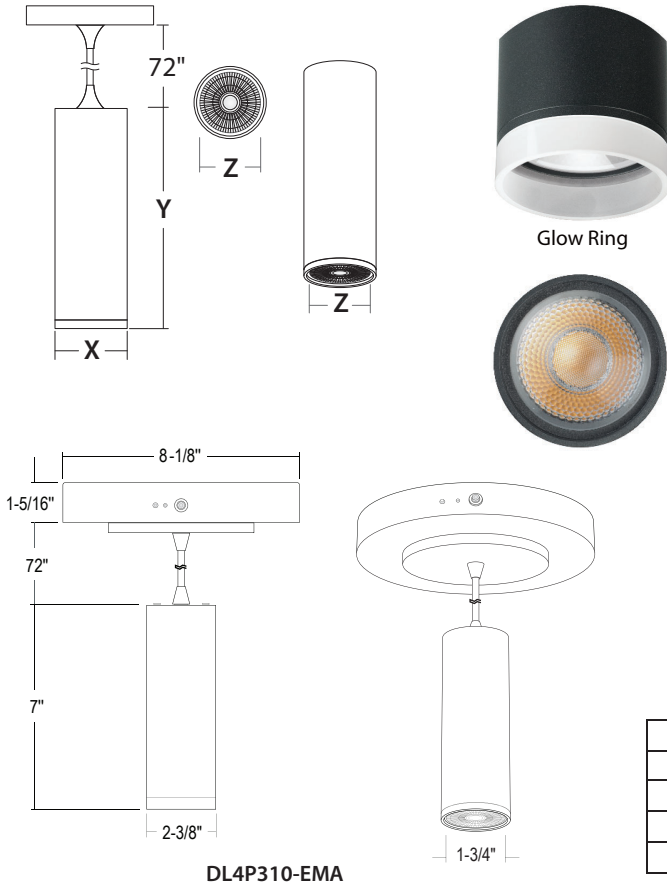

FIXTURE	X	Y	Z
DL4P310	2-3/8"	7"	1-3/4"
DL4P320	3"	8-1/4"	2-5/8"
DL4P330	3-1/8"	9"	2-5/8"
DL4P340	3-3/8"	10-1/4"	2-7/8"

ORDERING : DL4P310WUE-D10-B15-T30

[Click for Full Specification Details](#)

Fixture	Finish	Control	Beam Spread	Color Temperature	Accessories	Connector Options
Fixture		Control	Beam Spread	Color Temperature	Accessories	
1000lm (10W)	DL4P310	2-Wire/ Incandescent/ ELV Dimming (120V)	Blank	15° Spot	None	Blank
1800lm (20W)	DL4P320	0-10V Dimming (120V/277V)	UE-D10	25° Narrow	Black Hexcell Louver	-LVR ^{1,2}
2700lm (28W)	DL4P330	Athena Wireless Node (120V)	-AWN	45° Flood	Red Lens	/L39 ^{1,2}
3600lm (36W)	DL4P340	UniSense - Remotely Mounted Motion/Photosensor (120V)	-SUN-RMT ⁶	80° Wide Flood	Yellow Lens	/L40 ^{1,2}
		UniSense - Remotely Mounted Motion/Photosensor (120V/277V)	-SUN-RMT-1227 ⁶	Color Temperature	Blue Lens	/L41 ^{1,2}
Finish		Casambi Wireless Dimming (120V/277V)	-DCSM ⁵	2700K (90CRI)	Amber Lens	/L42 ^{1,2}
All Black	B	BubblyNet Wireless System (120V/277V)	-DBNT ⁵	3000K (90 CRI)	Green Lens	/L43 ^{1,2}
All White	W			3500K (90 CRI)	Lens with Internal Louver Filter	/L48 ^{1,2}
Silver	S ³			4000K (90 CRI)	Micro-Prismatic Spread Lens	/L53 ^{1,2}
				ColorSelect 3000K/3500K/4000K (90 CRI)	Integral Emergency Back Pack	-EMA ⁴
					Barn Door	-BD ¹
					Snoot	-SNT ¹
					Glow Ring	GLOW ¹
					Connector Option	
					Surface JBox Mount	Blank
					1CCT/1NT Connector	-1C1N
					2CCT/2NT Connector	-2C2N
					3CCT/1NT Connector	-3C1N

¹ Not available for DL4P310 when selecting UE-D10.
² Available on DL4P310 only, (not the UE-D10 version).
³ Special order. Minimum order quantity, extended lead time, and setup fee may apply. Consult Factory.
⁴ Only available for DL4P310 options.
⁵ Special Order. Consult factory.
⁶ (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.
⁷ (-B80) beam spread is only available with DL4P310 and DL4P320.