
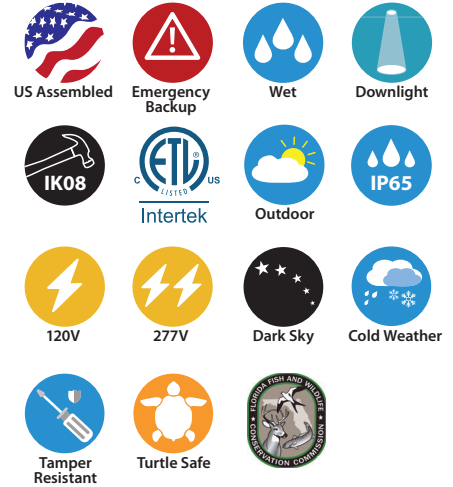


DLQ360 : 6" SQUARE

CEILING DOWNLIGHT (IP65) AMBER (TURTLE SAFE) 250LM (22W)

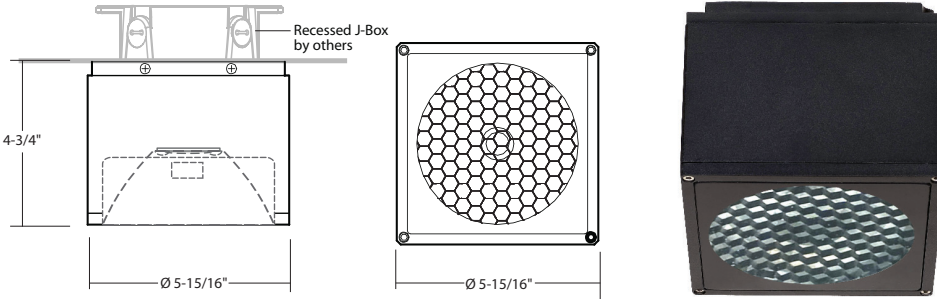

- Wildlife Lighting Approved
- Energy efficient, low glare LED Chip-On-Board light engine
- True Amber Narrow Wavelength 590nm LED
- Emergency back up available
- Integral Surface J-Box Option
- 5-Year Limited Warranty
- IK08 Rated

ORDERING : DLQ360BUE-DUN-TAM-LVR

[Click for Full Specification Details](#)

DLQ360

Fixture Finish Control Emergency Options LED Options

Finish		Control		Emergency Options		LED	
White	(RAL 9003) W	Non-Dimming (120V)	Blank	None	Blank	Amber - Limited Wavelength - 590nm	-TAM-LVR
Silver	(RAL 7037) S	UniDim™ 0-10V, ELV, Triac Dimming (120V/277V)	UE-DUN	Remote Location Emergency System	-EMAC		
Bronze	(RAL 8019) BZ	0-10V 1% Dimming (120V/277V)	UE-D10P1	Emergency integral to fixture	-EMA^{3,4}		
Black	(RAL 9005) B	347V 0-10V Dimming (347V)	-347-D10				
Light Silver	(RAL 7036) LS¹	Casambi Wireless Dimming (120V/277V)	-DCSM⁵				
Dark Grey	(RAL 7015) DG¹	BubblyNet Wireless System (120V/277V)	-DBNT⁵				
Metallic Gold	(RAL 1001) MG¹	SimplySnap Wireless System (120V/277V)	-DSYN⁶				
Metallic Black	(RAL 7021) MB¹						
						Options	
						None	Blank
						Photocell Sensor	-SDL
						Integral Junction Box 1-Outlet	-JB
						Surge Protector	-SRG
						Cold Weather	-CW^{2,4}
						Marine Grade Finish	-MGD¹

¹ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

² Starting temperature -30°C/-22°F; see pg. 6.

³ (-EMA) is only compatible with Non-Dimming and (UE-D10P1) control options.

⁴ (-EMA) is not compatible with (-CW) option.

⁵ Special Order.

⁶ Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.