

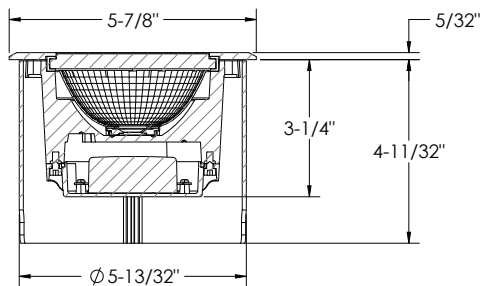


IG16 : 6" GEN2 LED IN-GRADE

500lm-1200lm (6W-14W)

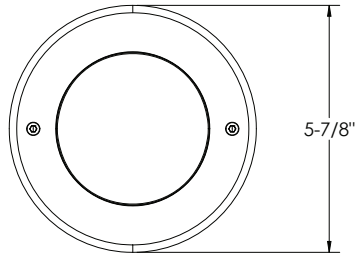

- IK10: High Impact Lens (Drive Over Capable)
- Stainless Steel Ring
- Uniform, Low Glare Illumination
- 5-Year Limited Warranty
- Singular COB Light Source
- Weather-Sealed Construction for Long-Term Reliability

ORDERING : IG16-L13-B25UE-D10-T27-FR

[Click for Full Specification Details](#)

Lumens Optics Control Color Temperature Options

Lumens	Optics	Control	Color Temperature	Options
500lm (6W)	IG16-L05	120V Non-Dimming	Blank	4000K (80 CRI) Blank
800lm (10W)	IG16-L08	TRIAC/ELV Dimming (120V)	-DIN	2700K (80 CRI) -T27
1200lm (14W)	IG16-L13²	0-10V Dimming (120V/277V)	UE-D10	3000K (80 CRI) -T30
		UE-DUN: UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-DUN¹	3500K (80 CRI) -T35
				5000K (80 CRI) -T50
Optics				
60° Flood	Blank			None Blank
10° Pencil Beam	-B10¹			Frosted Lens -FR
25° Narrow Flood	-B25			Slip Resistant -SR
45° Narrow Flood	-B45			
90° Very Wide Flood	-B90			
30° x 60° Asymmetric	-B3060			
Wall Wash	-BWW¹			

¹ Special order. Minimum Order, Extended lead time may apply. Consult Factory.

² Control option (-DIN) with Lumen option (-L13) is Special order. Minimum Order, Extended lead time may apply. Consult Factory.

Remote EM Option Available (50ft max distance) Consult Factory.