
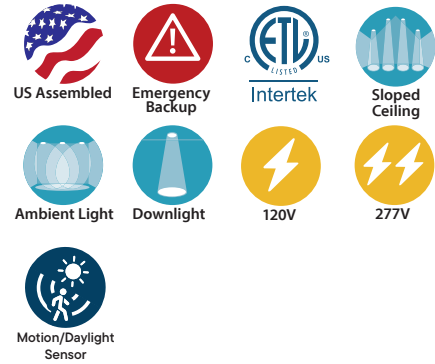


LCALD4 : 4" LUMEN CANNON

PENDANT/CEILING MOUNT 1000LM - 2600LM (10W-30W)

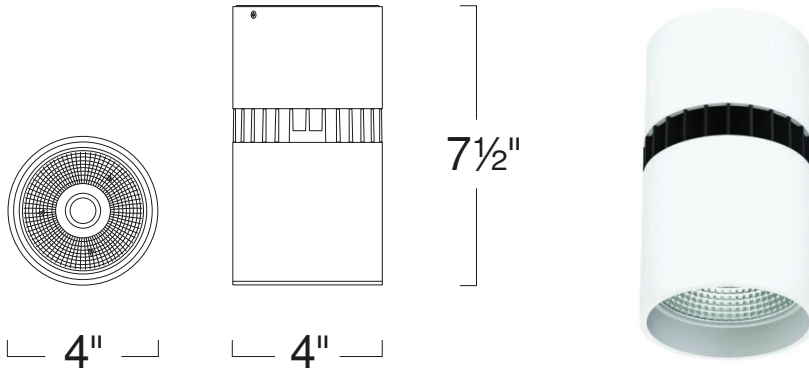

- 120V/277V Input Standard, 347V Available
- Exclusive UniDim™ Universal LED Dimming Option Works with 0-10V, ELV and Incandescent Controls
- 120V or 120V/277V Input Options
- Available TRIAC dimming available
- Wide spectrum of Color Temperatures
- Mounts to typical standard J-Box, perfect for ceilings up to 12'
- Small aperture and slender profile for discrete illumination
- Pendant mounting available for flat and sloped ceilings
- Suitable for dry locations

ORDERING : LCALD4010-B50-DIN-T30-C90-EMA

[Click for Full Specification Details](#)

LCALD4

Fixture	Finish	Lumen Package	Beam	Control	CCT	Accessories
Finish		Control		CCT		
White/Black Fins	LCALD4	Non-Dimming	Blank	3000K (80 CRI)	Blank	Integral Emergency Back Pack -EMA³
All White	LCALD4WW	Non-Dimming (120V/277V)	UE	3000K (90 CRI)	-T30-C90	Surface Mount J-Box -JBS
All Black	LCALD4B	0-10V Dimming (120V/277V)	UE-D10	3000K (97 CRI)	-T30-C97²	
Lumen Package¹		UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-DUN	2700K (90 CRI)	-T27-C90	
1000lm (10W)	010	TRIAC/ELV Dimming (120V)	-DIN	2700K (97 CRI)	-T27-C97²	
1400lm (14W)	140	Athena Wireless Node (120V)	-AWN⁴	3500K (80 CRI)	-T35-C80	
2000lm (20W)	200	UniSense - Integral Motion/Photosensor (120V)	-SUN-INT	3500K (90 CRI)	-T35-C90	
2600lm (30W)	260	UniSense - Integral Motion/Photosensor (120V/277V)	-SUN-INT-1227	4000K (80 CRI)	-T40-C80	
Beam Spread		Casambi Wireless Dimming (120V/277V)	-DCSM²	4000K (90 CRI)	-T40-C90	
40°	Blank	BubblyNet Wireless System (120V/277V)	-DBNT²	5000K (80 CRI)	-T50-C80	
50°	-B50			Warm Dimming	-TWD²	
70°	-B70			3000K-1800K		
Wall Wash	-BWW					

¹ Lumens are nominal delivered lumens. See Photometry page for exact values.
² Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.
³ Only available for (LCALD4010, or LCALD4140) with LPCM4, LPCMJ4, LPCMC4 options.
⁴ Must be ordered with -JBS.

347 Input with 0-10V available. Consult Factory for details and lead time.
 Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products. Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k.
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

MOUNTING ACCESSORIES

LPCMC4/LPCMCJ4
Cable Extension Kit for flat or sloped ceilings



LPCM4/LPCMJ4
Pendant Accessory for flat or sloped ceilings



LPCM4Q
Square Ceiling Adapter



LPCMC-CLAMP
Clamp Mount



LPCMC-HUB
Thread Hub for pipe mounting



See p. 5 for ordering and more detailed information on Mounting Accessories