
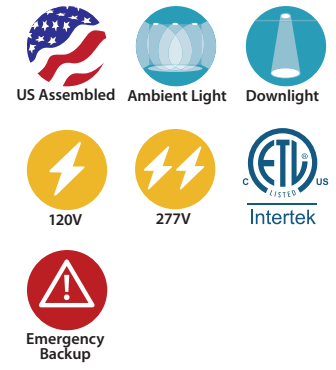


## LCALD6H50 : 16" LED REFRACTOR

SURFACE & PENDANT MOUNT 1100LM - 6000LM (10W-58W)

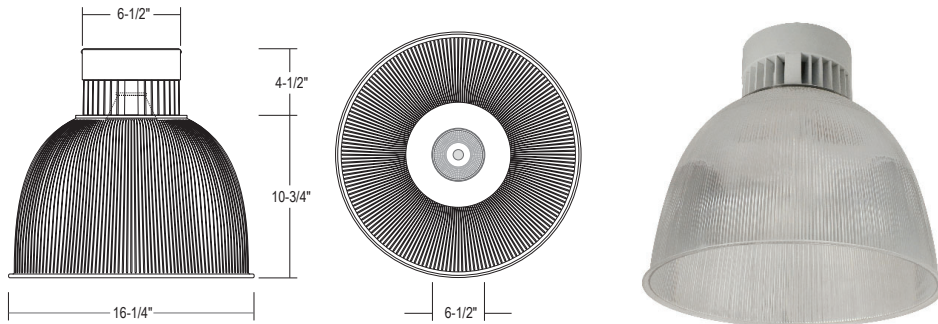

- 120V/277V Input Standard, 347V Available
- Exclusive UniDim™ Universal LED Dimming Option Works with 0-10V, ELV and Incandescent Controls
- 1% Dimming available with 120VAC, 0-10V, DALI, DMX AND Lutron Ecosystem
- Sturdy Steel Fixture Housing, <8lbs
- Pendant mounting available for flat and sloped ceilings
- Shock Absorbent Acrylic Refractor

### ORDERING : LCALD6H50W101-B30UE-DUN-C90

[Click for Full Specification Details](#)

#### LCALD6H50

Fixture	Finish	Lumens	Beam Spread	Control	CCT
<b>Finish</b>		<b>Beam Spread</b>		<b>Control</b>	
All Black	<b>B</b>	30° Narrow	<b>-B30</b>	Non-Dimming	<b>Blank</b>
All White	<b>W</b>	70° Wide	<b>-B70</b>	Triac/ELV (120V)	<b>-DIN</b>
Silver/Black Fins	<b>S</b>			Triac/ELV 1% Dimming (120V)	<b>-DINP1<sup>2</sup></b>
<b>Lumens<sup>1</sup></b>				0-10V Dimming (120V/277V)	<b>UE-D10</b>
1100lm (10W)	<b>101</b>			0-10V, 1% Dimming (120V/277V)	<b>UE-D10P1<sup>2</sup></b>
1500lm (15W)	<b>151</b>			UniDim™ 0-10V, ELV and Triac Dimming	<b>UE-DUN<sup>2</sup></b>
2100lm (20W)	<b>210</b>			DMX 0.1% Dimming	<b>UE-DMX</b>
2900lm (30W)	<b>320</b>			DALI Dimming	<b>UE-DLI<sup>2</sup></b>
3700lm (38W)	<b>350</b>			Lutron Hi-lume 1% Dimming	<b>UE-DHL<sup>2,3</sup></b>
4300lm (44W)	<b>450</b>			Ecosystem 5% Dimming	<b>UE-DEC<sup>2,3</sup></b>
6000lm (58W)	<b>550</b>				
					<b>CCT<sup>4</sup></b>
					3000K (80 CRI) <b>Blank</b>
					3000K (90 CRI) <b>-C90</b>
					3000K (97 CRI) <b>-C97<sup>2</sup></b>
					2700K (80 CRI) <b>-T27</b>
					2700K (90 CRI) <b>-T27-C90</b>
					2700K (97 CRI) <b>-T27-C97<sup>2</sup></b>
					3500K (80 CRI) <b>-T35</b>
					3500K (90 CRI) <b>-T35-C90</b>
					4000K (80 CRI) <b>-T40-C80</b>
					4000K (90 CRI) <b>-T40-C90</b>
					5000K (80 CRI) <b>-T50</b>

<sup>1</sup> Lumens are nominal delivered lumens. See Photometry page for exact values.  
<sup>2</sup> Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.  
<sup>3</sup> (UE-DEC) & (UE-DHL) not available for (550) lumen package.  
<sup>4</sup> (1) Blank: 3000K, 80CRI not available with (350) or (450) lumen package. (2) -T27: 2700K, 80CRI not available with (101), (151), (210) or (320). (3) -T27-C97: 2700K, 97CRI not available with (550). (4) -T35: 3500K, 80CRI not available with (350), (450), or (550). (5) -T40-C80: 4000K, 80CRI not available with (550).

347 Input with 0-10V available. Consult Factory for details and lead time.  
 Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products. Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k.  
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

### MOUNTING ACCESSORIES



See p. 4 for ordering and more detailed information on Mounting Accessories.