


LCALDJ5 : 5" CYLOPRO

ADJUSTABLE ACCENT 2500lm/3500lm (30W-45W)



Not recommended for horizontal wall mount

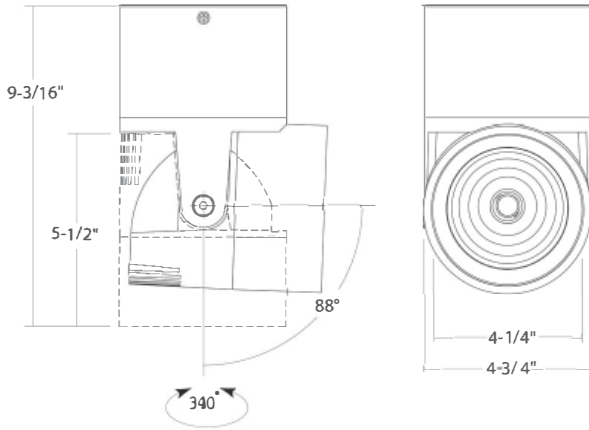

- Adjustable illumination with a small footprint
- Pendant or surface mount
- Multiple beam spreads
- Variety of dimming options

ORDERING : LCALDJ5W-L25-B25-DIN-T27-STM24-FR

[Click for Full Specification Details](#)

LCALDJ5

Fixture Finish Lumens Beam Spread Control Color Temperature Mounting Accessories

Finish

White	W
Black	B

Lumens

2500lm (30W)	-L25
3500lm (45W)	-L35

Beam Spread

40° Flood	Blank
15° Narrow Spot	-B15
25° Narrow Flood	-B25

Control

Non-Dimming (120V)	Blank
TRIAC/ELV Dimming (120V)	-DIN
0-10V Dimming (120V/277V)	UE-D10
UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-DUN
DALI Dimming (120V/277V)	UE-DLI¹
Athena Wireless Node (120V)	-AWN²
Athena Wireless Node Occupancy Sensor (120V)	-AWN-OCC²
Casambi Wireless Dimming (120V/277V)	-DCSM¹
BubblyNet Wireless System (120V/277V)	-DBNT¹

Color Temperature

3000K (90 CRI)	Blank
3000K (97 CRI)	-T30-C97
2700K (90 CRI)	-T27
2700K (97 CRI)	-T27-C97
3500K (90 CRI)	-T35
4000K (90 CRI)	-T40

Mounting

Surface Mount (4" Octagonal Jbox)	-40
12" Stem Pendant	-STM12
24" Stem Pendant	-STM24
36" Stem Pendant	-STM36
48" Stem Pendant	-STM48
12" Stem Pendant (Sloped Ceiling)	-STM12J
24" Stem Pendant (Sloped Ceiling)	-STM24J
36" Stem Pendant (Sloped Ceiling)	-STM36J
48" Stem Pendant (Sloped Ceiling)	-STM48J
72" 5-Wire Cord Mount	-CRD72

Accessories

None	Blank
Frosted Lens	-FR
Louver	-LVR

2025.01.05

¹ Special Order.
² Special Order. Must be ordered with LCMPD7-EMA-BLANK.