


LCD7415: APOLLO 15 CANOPY MOUNT LED TRACK HEAD 1500LM (21W)

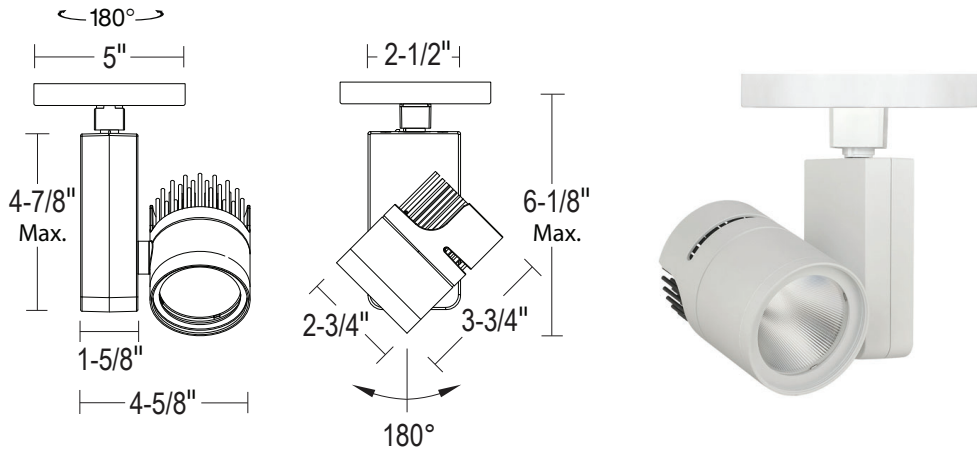

- Fully die-cast for high quality, long-lasting beauty
- 3 beam spread options for fine tuning footcandle distribution
- Powerful 1500 lumen output lights objects and spaces near and far
- MR16 75W performance in a long life, cool running LED track head
- Available with Tool-less field changeable optics
- 0-10V, ELV or 3-Wire Dimming options

ORDERING : LCD7415B-B15UE-DUN-DLV-T27-C90

[Click for Full Specification Details](#)

LCD7415

Fixture	Finish	Beam Spread	Control	Color Temperature	Option
Finish	Beam Spread	Control	Color Temperature		
All Black B	Spot -B15	Non-Dimming (120V) Blank	2700K (90 CRI) -T27-C90		
Bright White/Black Heat Sink W	Narrow Flood -B25	UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V) UE-DUN	3000K (90 CRI) -T30-C90		
	Flood -B45	Athena Wireless Node (120V) -AWN	3500K (90 CRI) -T35-C90		
		UniSense - Remotely Mounted Motion/Photosensor (120V) -SUN-RMT²	4000K (90 CRI) -T40-C90		
		UniSense - Remotely Mounted Motion/Photosensor (120V/277V) -SUN-RMT-1227²	6500K (80 CRI) -T65		
		Casambi Wireless Dimming (120V/277V) -DCSM¹	1850K-2700K -TWD		
		BubblyNet Wireless System (120V/277V) -DBNT¹	Warm Dimming		
			Option		
			None Blank		
			MR16 Hex Louver -LVR¹		

2025.09.26

¹ Special Order
² Must be ordered with compatible Input Voltage Dimming Option.
 Available with 0-10V and DMX Dimming. Consult Factory.
 Available with 277V input & Multi-Circuit Track. Consult Factory.