


LCD7430 : APOLLO 30 CANOPY MOUNT LED TRACK HEAD 2900LM (32W)

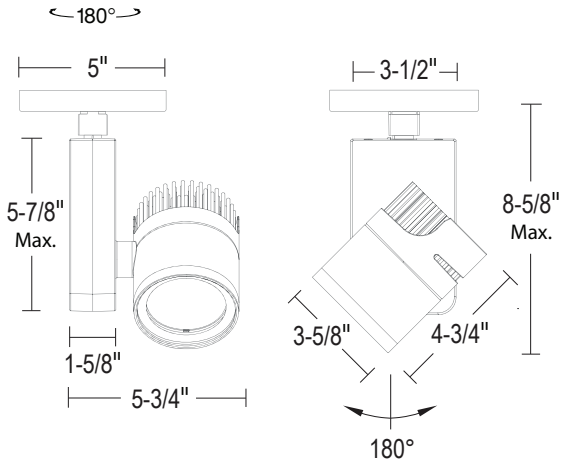

- Fully die-cast for high quality, long-lasting beauty
- 3 beam spread options for fine tuning footcandle distribution
- Powerful 2900 lumen output lights objects and spaces near and far
- MR16 75W performance in a long life, cool running LED track head
- Available with Tool-less field changeable optics
- 0-10V, ELV or 3-Wire Dimming options

ORDERING : LCD7430B-B15UE-DUN-T27-C90

[Click for Full Specification Details](#)

LCD7430

Fixture	Finish	Beam Spread	Control	Color Temperature	Option
	Finish	Beam Spread	Control	Color Temperature	Option
All Black	B	Spot	-B15	Non-Dimming (120V)	Blank
Bright White/Black Heat Sink	W	Narrow Flood	-B25	UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-DUN
		Flood	-B45	Athena Wireless Node (120V)	-AWN
				UniSense - Remotely Mounted Motion/Photosensor (120V)	-SUN-RMT²
				UniSense - Remotely Mounted Motion/Photosensor (120V/277V)	-SUN-RMT-1227²
				Casambi Wireless Dimming (120V/277V)	-DCSM¹
				BubblyNet Wireless System (120V/277V)	-DBNT¹

Color Temperature	
2700K (90 CRI)	-T27-C90
3000K (90 CRI)	-T30-C90
3500K (90 CRI)	-T35-C90
4000K (90 CRI)	-T40-C90
1850K-2700K	-TWD
Warm Dimming	

Option	
None	Blank
MR16 Hex Louver	-LVR¹

2025.09.26

¹Special Order

² Must be ordered with compatible Input Voltage Dimming Option.

Available with 277V input & Multi-Circuit Track. Consult Factory.