


## LCD7445 : APOLLO 50 CANOPY MOUNT LED TRACK HEAD 4500LM (48W)

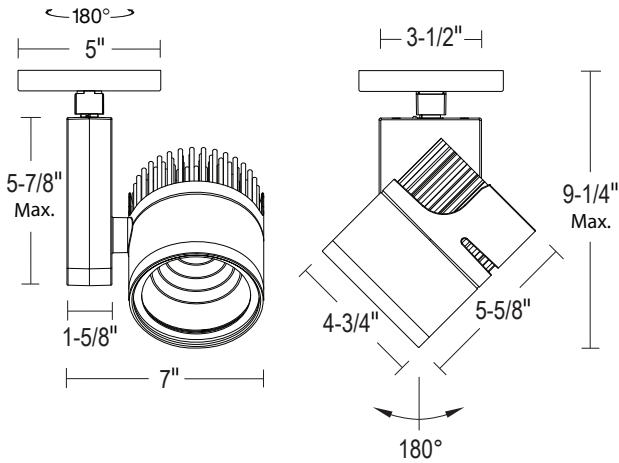

- Fully die-cast for high quality, long-lasting beauty
- 4 beam spread options for fine tuning footcandle distribution
- Powerful 4500 lumen output lights objects and spaces near and far
- T4 & T6 performance in a long life, cool running LED track head
- 0-10V, ELV or 3-Wire Dimming options

### ORDERING : LCD7445B-B15UE-DUN-T27-C90

[Click for Full Specification Details](#)

#### LCD7445

Fixture	Finish	Beam Spread	Control	Color Temperature	Accessories
	<b>Finish</b>	<b>Beam Spread</b>	<b>Control</b>	<b>Color Temperature</b>	
	All Black <b>B</b>	Spot <b>-B15</b>	Non-Dimming (120V)	<b>Blank</b>	2700K (90 CRI) <b>-T27-C90</b>
	Bright White/ Black Heat Sink <b>W</b>	Narrow Flood <b>-B25</b>	UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	<b>UE-DUN</b>	3000K (90 CRI) <b>-T30-C90</b>
		Flood <b>-B45</b>	DMX Dimming with input via LED driver (shared input/output ports) (120V/277V)	<b>UE-DMX</b>	3500K (90 CRI) <b>-T35-C90</b>
		Extra Wide Flood <b>-B60</b>	Athena Wireless Node (120V)	<b>-AWN</b>	4000K (90 CRI) <b>-T40-C90</b>
			UniSense - Remotely Mounted Motion/Photosensor (120V)	<b>-SUN-RMT<sup>2</sup></b>	<b>Option</b>
			UniSense - Remotely Mounted Motion/Photosensor (120V/277V)	<b>-SUN-RMT-1227<sup>2</sup></b>	None <b>Blank</b>
			Casambi Wireless Dimming (120V/277V)	<b>-DCSM<sup>1</sup></b>	MR16 Hex Louver <b>-LVR<sup>1</sup></b>
			BubblyNet Wireless System (120V/277V)	<b>-DBNT<sup>1</sup></b>	

2025.09.26

<sup>1</sup>Special Order

<sup>2</sup> Must be ordered with compatible Input Voltage Dimming Option.

Available with 277V input & Multi-Circuit Track. Consult Factory.