


LCMPD-BVL-QP : 5" & 7" SQUARE BEVEL LUMENPAD PENDANT

1000LM / 1300LM (10W/14W)

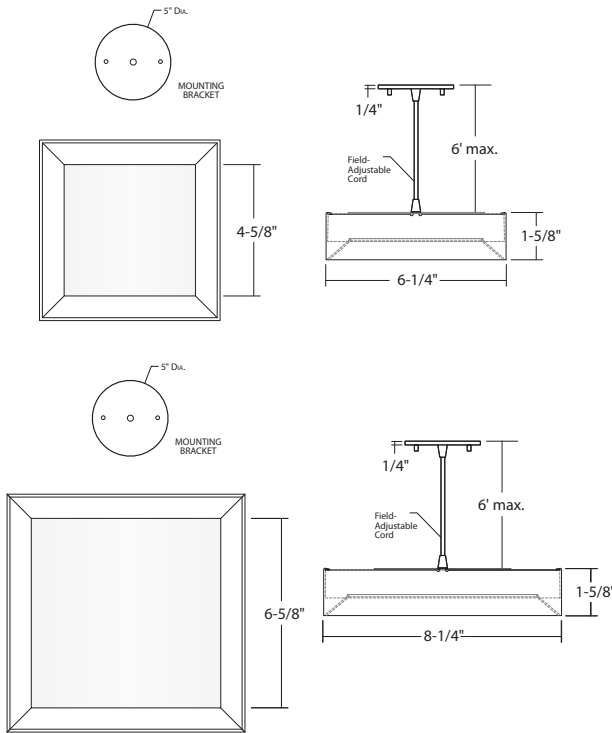

- New Bevel Trim Tapered Design
- Complements modern and architectural interiors
- Robust anodized color finishes
- WET LOCATION – For covered ceiling mount only
- Multiple Wireless Control Options
- Remote Emergency Available
- Various Color Temperatures and ColorSelect
- Low Glare

ORDERING : LCMPD-BVL-5QPW-TS27

[Click for Full Specification Details](#)

Fixture	Finish	Control	Color Temperature	Emergency Options	Mounting
Fixture		Uplight	Color Temperature	Emergency Options	Emergency Options
5" Square Bevel LumenPad Pendant 1000lm (10W)	LCMPD-BVL-5QP	None	Blank	2700K (90 CRI)	-TS27
		1000lm	-LU10⁷	3000K (90 CRI)	-TS30
				3500K (90 CRI)	-TS35
				4000K (90 CRI)	-TS40
				5000K (90 CRI)	-TS50
				Color Select 2700K/3000K/3500K/4000K/5000K (90 CRI)	-TS2750
7" Square Bevel LumenPad Pendant 1300lm (14W)	LCMPD-BVL-7QP	Control			Mounting
		TRIAC/ELV Dimming (120V)	Blank²		Surface J-Box Mount Blank
		0-10V Dimming (120V/277V)	UE-D10⁵		1CCT/1INT Connector -1C1N
		Casambi Wireless Dimming (120V/277V)	-DCSM		2CCT/2INT Connector -2C2N
		BubblyNet Wireless System (120V/277V)	-DBNT		3CCT/1INT Connector -3C1N
		Athena Wireless Node (120V)	-AWN		
Finish⁶					
White	W¹				
Black	B				
Silver	S¹				
Bronze	BZ				
Matte Gold	MG¹				

¹ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

² California Title 24/JA8 compliant with (Blank) TRIAC/ELV Dimming (120V) only.

³ Remote Location Emergency System only available for (UE-D10).

⁴ Check Wiring Diagram for Remote Emergency Backup.

⁵ Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.

⁶ Silver, Bronze, and Matt Gold finish comes standard with Black pendant mounting bracket and cord.

⁷ Uplight option -LU10 is (120V) input only.