




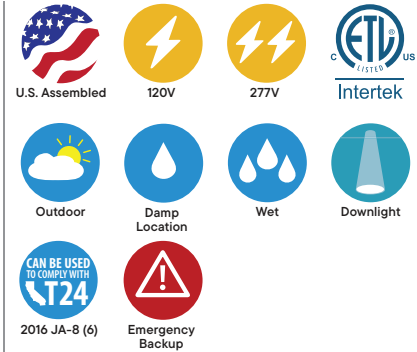



LCMPD-BVL : 5" & 7" SQUARE BEVEL LUMENPAD 1000LM/1300LM (10W/14W)

5" BEVEL



7" BEVEL



- New Bevel Trim Tapered Design
- Complements modern and architectural interiors
- Robust anodized color finishes
- WET LOCATION – For covered ceiling mount only
- Multiple Wireless Control Options
- Remote Emergency Available
- Various Color Temperatures and ColorSelect
- Low Glare

ORDERING : LCMPD-BVL-5QW-TS27



[Click for Full Specification Details](#)

Fixture	Finish	Control	Color Temperature	Emergency Options
Fixture		Control	Color Temperature	Emergency Options
5" Square Bevel LumenPad 1000lm (10W)	LCMPD-BVL-5Q	TRIAC/ELV Dimming (120V) 0-10V Dimming (120V/277V) Casambi Wireless Dimming (120V/277V)	Blank ³ UE-D10 -DCSM	2700K (90 CRI) -TS27 3000K (90 CRI) -TS30 3500K (90 CRI) -TS35
7" Square Bevel LumenPad 1300lm (14W)	LCMPD-BVL-7Q	BubblyNet Wireless System (120V/277V) Athena Wireless Node (120V) Athena Wireless Node Occupancy Sensor (120V)	-DBNT -AWN -AWN-OCC	4000K (90 CRI) -TS40 5000K (90 CRI) -TS50 ⁶ Color Select 2700K/3000K/3500K/4000K/5000K (90 CRI) -TS2750 ⁶
Finish				
White	W ²			None Blank
Black	B			Remote Location -EMAC ^{4,5}
Silver	S ²			Emergency System
Bronze	BZ			
Matte Gold	MG ²			

¹ Special order. Minimum Order, Extended lead time may apply. Consult Factory.

² Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

³ California Title 24/JA8 compliant with (Blank) TRIAC/ELV dimming (120V) only.

⁴ Remote Location Emergency System only available for (UE-D10).

⁵ Check Wiring Diagram for Remote Emergency Backup.

⁶ TRIAC/ELV Dimming (120V) not available for -TS2750 and -TS50.