
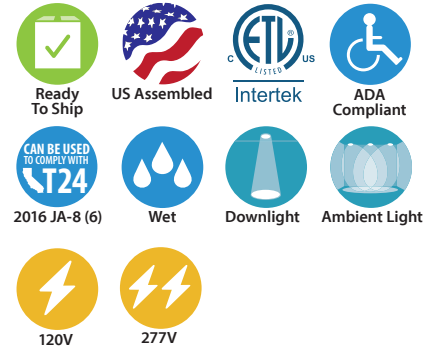


## LCMPD12R : 12" LUMENPAD ROUND

LED DOWNLIGHT SURFACE MOUNT 2000LM (22W)

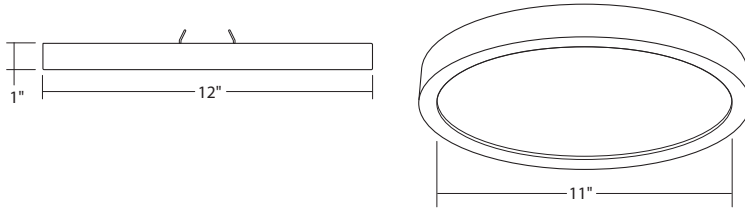

- Easily mounts to standard octagonal J-Box
- Super Slim 1" thick with die-cast aluminum frame
- No-glare side lit illumination
- Suitable for temperature down to -4°F/-20°C
- WET LOCATION – For covered ceiling mount only
- 3-Years Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant

### ORDERING : LCMPD12RWUE-D10-TS30



[Click for Full Specification Details](#)

#### LCMPD12R

Fixture      Finish      Control      Color Temperature

Finish <sup>2</sup>	Control <sup>4</sup>	Color Temperature
White <b>W</b>	TRIAC/ELV Dimming (120V)	<b>Blank<sup>3</sup></b> 2700K (90 CRI) <b>-TS27</b>
Black <b>B</b>	0-10V Dimming (120V/277V)	<b>UE-D10<sup>5</sup></b> 3000K (90 CRI) <b>-TS30</b>
Silver <b>S</b>	Athena Wireless Node (120V)	<b>-AWN<sup>1</sup></b> 3500K (90 CRI) <b>-TS35</b>
Bronze <b>BZ</b>	Casambi Wireless Dimming (120V/277V)	<b>-DCSM<sup>1</sup></b> 4000K (90 CRI) <b>-TS40</b>
Matt Gold <b>G<sup>6</sup></b>	BubblyNet Wireless System (120V/277V)	<b>-DBNT<sup>1</sup></b> 5000K (90 CRI) <b>-TS50</b>
		ColorSelect 2700K/3000K/3500K/4000K/5000K (90 CRI) <b>-TS2750</b>
		ColorSelect 3000K/3500K/4000K (90 CRI) <b>-TS354</b>

<sup>1</sup> Special Order. Must be ordered with LCMPD7-EMA-BLANK.  
<sup>2</sup> Field paintable ring options available. Consult factory.  
<sup>3</sup> California Title 24/JA8 compliant with (Blank) TRIAC/ELV Dimming (120V) only.  
<sup>4</sup> Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.  
<sup>5</sup> Remote Emergency Battery Back Up Option only available for (UE-D10).  
<sup>6</sup> Special Order. Extended lead time.