
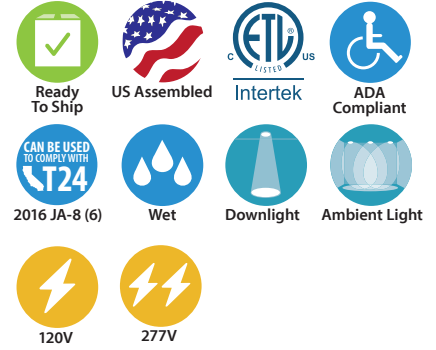
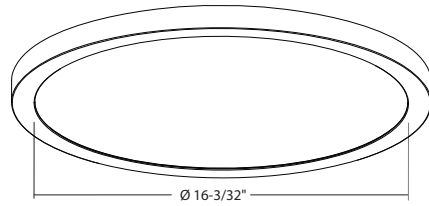


## LCMPD18R : 18" LUMENPAD ROUND

LED DOWNLIGHT SURFACE MOUNT 2800LM (30W)



- Easily mounts to standard octagonal J-Box
- Super Slim 1" thick with die-cast aluminum frame
- No-glare side lit illumination
- Suitable for temperature down to -4°F/-20°C
- WET LOCATION – For covered ceiling mount only
- 3-Years Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant

### ORDERING : LCMPD18RWUE-D10-TS30

 [Click for Full Specification Details](#)

#### LCMPD18R

Fixture	Finish	Control	Color Temperature
<b>Finish<sup>2</sup></b>	<b>Control<sup>3</sup></b>	<b>Color Temperature</b>	
White <b>W</b>	TRIAC/ELV Dimming (120V) <b>Blank</b>	2700K (90 CRI) <b>-TS27<sup>1</sup></b>	
Black <b>B<sup>1</sup></b>	0-10V Dimming (120V/277V) <b>UE-D10<sup>4</sup></b>	3000K (90 CRI) <b>-TS30</b>	
Silver <b>S<sup>1</sup></b>	Athena Wireless Node (120V) <b>-AWN</b>	3500K (90 CRI) <b>-TS35</b>	
Bronze <b>BZ<sup>1</sup></b>	Athena Wireless Node <b>-AWN-OCC<sup>5</sup></b>	4000K (90 CRI) <b>-TS40</b>	
Matt Gold <b>G<sup>5</sup></b>	Occupancy Sensor (120V)	ColorSelect 3000K/ 3500K/4000K (90 CRI) <b>-TS354</b>	

2026.01.20

<sup>1</sup> Special Order. Extended lead time.  
<sup>2</sup> Field paintable ring options available. Consult factory.  
<sup>3</sup> Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.  
<sup>4</sup> Remote Emergency Battery Back Up Option only available for (UE-D10). Consult factory.  
<sup>5</sup> Special Order. Minimum order. Extended lead time.