
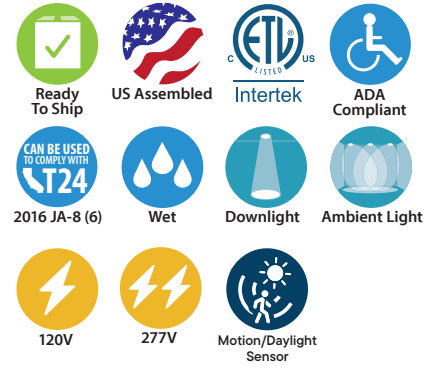


## LCMPD7Q : 7" LUMENPAD SQUARE

LED DOWNLIGHT SURFACE MOUNT 1300LM (14W)

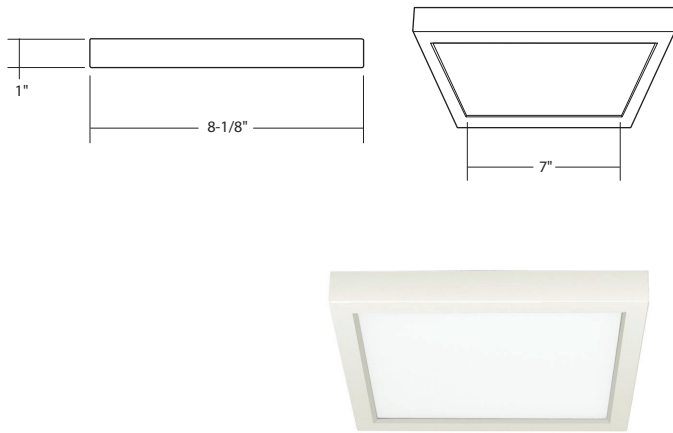

- Easily mounts to standard octagonal J-Box
- Super Slim 1" thick with die-cast aluminum frame
- No-glare side lit illumination
- Suitable for temperature down to -4°F/-20°C
- WET LOCATION – For covered ceiling mount only
- 3-Year Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant
- Multiple Wireless Control Options

### ORDERING : LCMPD7QWUE-D10-TS30

 [Click for Full Specification Details](#)

#### LCMPD7Q

Fixture      Finish      Control      Color Temperature

Finish <sup>1</sup>	Control <sup>3</sup>	Color Temperature
White <b>W</b>	TRIAC/ELV Dimming (120V)	<b>Blank<sup>2</sup></b> 2700K (90 CRI) <b>-TS27</b>
Black <b>B</b>	0-10V Dimming (120V/277V)	<b>UE-D10<sup>4</sup></b> 3000K (90 CRI) <b>-TS30</b>
Silver <b>S</b>	Athena Wireless Node (120V)	3500K (90 CRI) <b>-TS35</b>
Bronze <b>BZ</b>		4000K (90 CRI) <b>-TS40</b>
Matt Gold <b>G<sup>5</sup></b>	UniSense - Integral Motion/Photosensor (120V/277V)	5000K (90 CRI) <b>-TS50</b>
	Casambi Wireless Dimming (120V/277V)	ColorSelect 2700K/3000K/3500K/4000K/5000K (90 CRI) <b>-TS2750</b>
	BubblyNet Wireless System (120V/277V)	ColorSelect 3000K/3500K/4000K (90 CRI) <b>-TS354</b>

<sup>1</sup> Field paintable ring options available. Consult factory.

<sup>2</sup> California Title 24/JA8 compliant with (Blank) TRIAC/ELV dimming (120V) only.

<sup>3</sup> Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.

<sup>4</sup> Remote Emergency Battery Back Up Option only available for (UE-D10).


<sup>5</sup> Special Order. Extended lead time.

<sup>6</sup> Special Order. Must be ordered with LCMPD7Q-EMA-BLANK.

### ACCESSORIES

#### LCMPD7Q-EMA

1-3/8"H x 8-1/8" square die-cast aluminum integral emergency battery backup




#### LCMPD7Q-EMA-BLANK

1-3/8"H x 8-1/8" square die-cast aluminum body only without emergency backup



#### LCMPD7Q-JB

1-3/8"H x 8-1/8" square die-cast aluminum J-Box with up to (4) 7/8" holes for conduit fittings



(LCMPD7Q-EMA), (LCMPD7Q-EMA-BLANK), and (LCMPD7Q-JB) mount to top of LCMPD7Q