


## LHABLD4 - 4" LUMENBLAST

OPEN & LENSED DOWNLIGHTS, ROUND, 1000LM - 7000LM



H1 = 5" up to 41W  
 H2 = 6-3/8" for 51W and 64W  
 Ceiling Cut-out: 4-3/4" Dia.

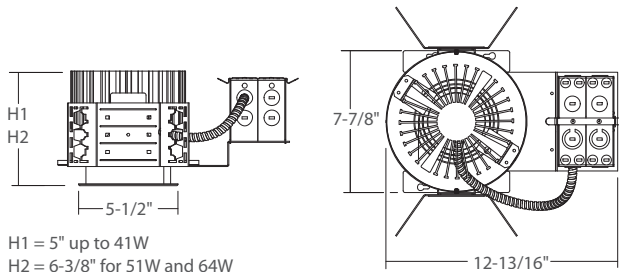

LHABLD4



- Illuminate up to 70' ceilings
- Four trim finishes
- Low glare design
- Highly efficient COB (Chip on Board) LED
- Multiple Wireless Control Options

### ORDERING : LHABLD420C050UE-DUN-B45-TWD-FS/LRB41S

[Click for Full Specification Details](#)

#### LHABLD4

Fixture	Lumens	Control	Beam Spread	Color Temperature	Frame Options	Trim
Downlight	<b>LHABLD4</b>	Control <sup>1</sup>	Blank -RMT UE-DUN	25° Narrow Flood -B25 45° Flood -B45 60° Wide Flood -B60 90° Very Wide Flood -B90	None Generator Transfer Device -GTD Single Fuse -FS 10W Emergency Battery -EM Full Power -EMAC <sup>5</sup> Emergency Inverter Full Power -EMAC347 <sup>5</sup> Emergency Inverter (347V) C-Channel Hanger Bar Set C260 Adjustable C-Channel Hanger Bar Set C260-J	Blank -GTD -FS -EM -EMAC <sup>5</sup> -EMAC347 <sup>5</sup> C260 C260-J
Lumens (Nominal Delivered)			Blank -RMT UE-DUN	Color Temperature		Trim (Open)
1000lm (9W)	12C025*	Non-Dimming Remote Driver UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-D10	2700K (90 CRI) -T27 2700K (97 CRI) -T27-C97 3000K (90 CRI) -T30 3000K (97 CRI) -T30-C97 3500K (90 CRI) -T35 4000K (90 CRI) -T40 Warm dimming -TWD <sup>3</sup> Tunable White -TTW <sup>4</sup> 2700K-6500K		All White LRB41W All Black LRB41B All Satin Haze LRB41S Satin Haze/White LRB41SW Clear/White LRB41CW Specular Clear LRB41C
1500lm (13W)	15C035*	0-10V Dimming (120V/277V)	-DIN			Trim (Frosted Lens)
2500lm (19W)	20C050*	TRIAC/ELV Dimming (120V) eldoLED Dim to Dark	UE-D10PZ			All White LRB42W All Black LRB42B All Satin Haze LRB42S Satin Haze/White LRB42SW Clear/White LRB42CW Specular Clear LRB42C
3500lm (28W)	35C070*	10% Wireless Enocean Adapter	UE-DEN			(For wet locations add -WL)
5000lm (41W)	45C105*	DMX Dimming with input via XLR5 (120V/277V)	UE-DMXLR5			
6000lm (51W)	50C085**	DMX Dimming with input via RJ45 (120V/277V)	UE-DMXRJ45			
7000lm (64W)	60C105**6	1% 0-10V Dimming (120V/277V) 5% 0-10V Dimming (347V) Lutron Hi-Lume (120V/277V) 1% 2-Wire Incandescent (120V) Athena Wireless Node (120V) UniSense - Remotely Mounted Motion/Photosensor (120V) UniSense - Remotely Mounted Motion/Photosensor (120V/277V) Casambi Wireless Dimming (120V/277V) BubbyNet Wireless Dimming (120V/277V) Lutron Vive Wireless Dimming Module (120V/277V)	UE-D10P1 -347-D10 UE-DHL DINP1 <sup>2</sup> -AWN -SUN-RMT <sup>6,8</sup> -SUN-RMT-1227 <sup>6,8</sup> -DCSM <sup>7</sup> -DBNT <sup>7</sup> -VIVE <sup>7</sup>			

\* H1 = 5" Maximum Height.  
 \*\* H2 = 6-3/8" Maximum Height.

<sup>1</sup> All drivers are 120V/277V unless otherwise noted.  
<sup>2</sup> Not available for 1000lm - 3500lm.  
<sup>3</sup> Warm Dimming Only available for 1000lm & 1500lm options.  
<sup>4</sup> Tunable White only available with 0-10V signal via "UE-D10P1" option or DMX signal via "UE-DMX" option for 1500lm & 3500lm option only.  
<sup>5</sup> Check wiring diagrams  
<sup>6</sup> Not compatible to UE-DUN Driver.  
<sup>7</sup> Special Order.  
<sup>8</sup> (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

#### OPTIONS

- /C260 C-Channel Hanger Bar Set
- /C260-J Adjustable C-Channel Hanger Bar Set

