
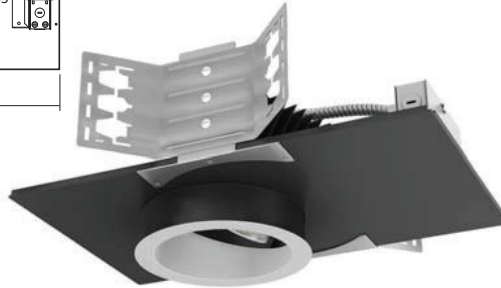


LHAJLD6 : 6" LUMENBLAST

ADJUSTABLE ACCENT & LENSED WALL WASH, ROUND, 1500LM - 10,000LM

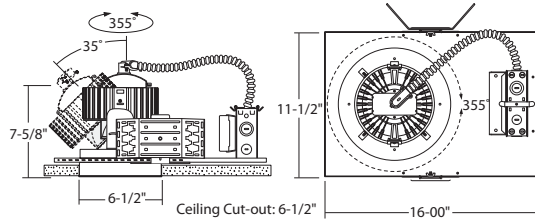

- Illuminate up to 100' ceilings
- Adjustable to 35° angle & 355° of rotation.
- Four trim finishes
- Low glare design
- Highly efficient COB (Chip on Board) LED

ORDERING : LHAJLD620C050UE-DUN-B45-T27-FS/LRA671S



[Click for Full Specification Details](#)

LHAJLD6

Fixture Lumens Control Beam Spread Color Temperature Frame Options / Trim

Fixture	Lumens	Control	Beam Spread	Color Temperature	Frame Options	Trim	
Adjustable Downlight	LHAJLD6	Non-Dimming Remote Driver TRIAC/ELV Dimming (120V) 0-10V Dimming (120V/277V) eldoLED Dim to Dark 10%, Wireless Enocean Adapter (120V/277V) DMX Dimming with input via XLR5 (120V/277V) DMX Dimming with input via RJ45 (120V/277V) 1%, 0-10V Dimming (120V/277V) 0-10V Dimming (347V) Lutron Hi-Lume (120V/277V) 1%, 2-Wire Incandescent (120V) Dali Dimming Athena Wireless Node (120V) UniSense - Remotely Mounted Motion/Photosensor (120V) UniSense - Remotely Mounted Motion/Photosensor Casambi Wireless Dimming BubblyNet Wireless System Lutron Vive Wireless Dimming Module	Blank -RMT -DIN UE-D10 UE-D10PZ¹⁰ UE-DEN⁸ UE- DMXLR5⁸ UE- DMXRJ45⁸ UE-D10P1 -347-D10 UE-DHL1⁸ DINP1⁷ -DLI⁸ -AWN -SUN-RMT⁹ -SUN-RMT-1227⁹ -DCSM⁸ -DBNT⁸ -VIVE⁸	25° Narrow Flood -B25 45° Flood -B45 60° Wide Flood -B60 90° Very Wide Flood -B90	2700K, 80 CRI -T27 2700K, 90 CRI -T27-C90 2700K, 97 CRI -T27-C97³ 3000K, 80 CRI -T30 3000K, 90 CRI -T30-C90 3000K, 97 CRI -T30-C97³ 3500K, 80 CRI -T35 4000K, 80 CRI -T40 Warm dimming 1850K-3000K Tunable White 2700K-6500K -TTW^{5,8} -TWD^{4,8}	None Generator Transfer Device Single Fuse 10W Emergency Battery Full Power Emergency Inverter Full Power Emergency Inverter (347V) C-Channel Hanger Bar Set Adjustable C-Channel Hanger Bar Set Trim (Open Adjustable) All White All Black All Satin Haze Satin Haze/White Trim (Frosted Lens Wall Wash) All White All Black All Satin Haze Satin Haze/White (For wet locations add -WL)	Blank -GTD -FS -EM -EMAC⁶ -EMAC 347⁶ C260 C260-J LRA671W LRA671B LRA671S LRA671SW LRA672W LRA672B LRA672S LRA672SW

¹ 4000lm, 8000lm and 10,000lm not available with Lutron (Hi-Lume) driver.

² All drivers are 120V/277V unless otherwise noted.

³ 97 CRI available for lumen packages of 5000lm and above.

⁴ Warm Dimming only available for 1500lm, 2000lm & 2500lm options.

⁵ Tunable White only available with 0-10V signal via UE-D10P1 option or DMX signal via UE-DMX option for 1500lm, 2000lm, 2500lm, 3000lm & 5000lm option only.

⁶ Check wiring diagrams.

⁷ DINP1 only available for 1500lm, 2000lm & 2500lm options.

⁸ Special Order. Extended lead time may apply. Consult Factory.

⁹ (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

¹⁰ Not available for 10,000lm

OPTIONS

/C260
C-Channel Hanger Bar Set



/C260-J
Adjustable C-Channel Hanger Bar Set

