



LRLD2524: 2.5" P-SERIES


RECESSED LED - SHALLOW PINHOLE, 1100LM/1500LM/2000LM

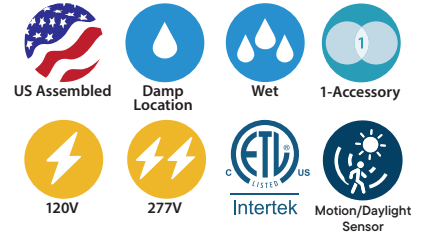

- 1100lm (15W), 1500lm (22W), and 2000lm(30W) lumen packages
- Equivalent to 75W MR16 Output
- Ideal where space is limited and energy savings is important
- 0.5% dimming for 600lm (-L09), 5% dimming for 980lm (-L14), and 1400lm (-L24)

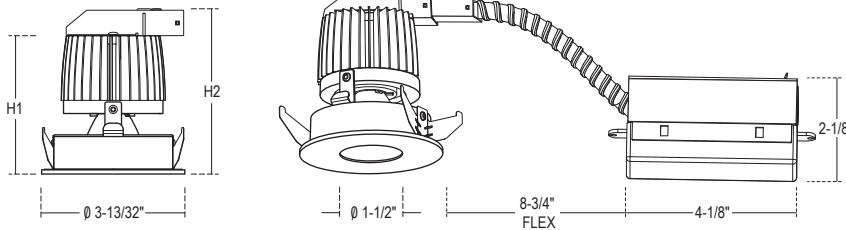

-L09: H1: 3-1/4" H2: 3-7/8"
-L14: H1: 4-1/2" H2: 5-1/8"
 Ceiling Cut-Out: 2-15/16" Max
 Ceiling Thickness: **-L09:** 2" Max
-L14: 3" Max

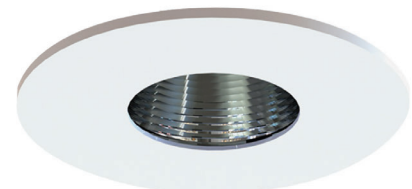

LRLD2524
Shallow Pinhole

ORDERING : LRLD2524W-L09-B25-T27UE-DUN-WL



[Click for Full Specification Details](#)

Fixture	Ring Finish	Lumens	Beam Spread	Color Temp	Control	Rating
Fixture		Color Temp		Control		Rating
Shallow Pinhole	LRLD2524	90 CRI		Triac Dimming (120V)	Blank³	None
Ring Finish		3000K (90 CRI)	Blank	0-10V Dimming (120V/277V)	UE-D10	Airtight Lensed (Wet Location)
White	W	1700K (90 CRI)	-T17⁶	UniDim™ 0-10V, ELV, Triac Dimming (120V/277V)	UE-DUN	4" JBox (Chicago Plenum)
Black	B	2700K (90 CRI)	-T27	0-10V 1% Dimming (120V/277V)	UE-D10P1	
Lumens		3500K (90 CRI)	-T35	Lutron EcoSystem Dimming (1%)	-DEC^{6*}	
1100lm (15W)	-L09²	4000K (90 CRI)	-T40	Athena Wireless Node (120V)	-AWN	
1500lm (22W)	-L14⁴	Color Temp		Athena Wireless Node	-AWN-OCC	
2000lm (30W)	-L24^{4,6}	97 CRI		Occupancy Sensor (120V)		
Beam Spread		3000K (97 CRI)	-C97	UniSense - Remotely Mounted Motion/Photosensor (120V)	-SUN-RMT³	
10° Narrow Spot	-B10⁶	2700K (97 CRI)	-T27-C97	UniSense - Remotely Mounted Motion/Photosensor	-SUN-RMT-1227³	
25° Narrow Flood	-B25	3000K - 1800K Warm Dimming	-TWD^{2,4,6}	Casambi Wireless Dimming	-DCSM¹	
35° Flood	-B35			BubblyNet Wireless System	-DBNT¹	
60° Wide Flood (Flush Frosted Lens Included)	-B60⁵					

¹Special Order.

²(-TWD) Warm Dimming only available for (-L09) lumen package.

³(-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

⁴(-TWD) Warm Dimming, (-L14) 1400lm and (-L24) 2400lm are not available for both LHLD25IC-FRM (IC) or LHFRLD25 (Fire-Rated)

⁵Achieved through a filter at 60° aperture level.

⁶(-B10) Beam Spread, (-T17) 1700K color temperature, (-DEC) Lutron EcoSystem, and (-TWD) Warm Dimming options are not available for 2000lm (-L24) lumen package.

*Special order, minimum order. Lead times apply. Consult factory for emergency battery options.

LRLD2524 and LHQLD25-FRM for (-L14) 1200lm is available with LFB2012 for Fire-Rated Application.

NOTE: For commercial applications with 1/2" Pipe or Flex-Conduit (**LITON# PCT031**) Fitting Adaptor should be used. Consult Factory.