




LRLD2567: 2.5" P-SERIES

RECESSED LED - ADJUSTABLE PULL DOWN ROUND FLANGED, 550LM (7W)



- Tilts 75° with 360° rotation
- White or Black cylinder, reflector, and flange ring finishes
- 120V triac dimming standard

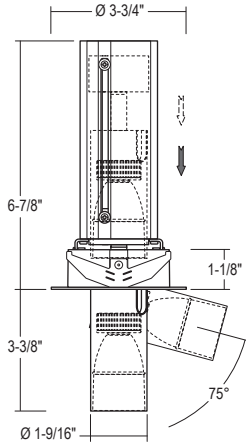

Ceiling Cut-Out: 3-1/4" Max
 Ceiling Thickness (Frameless): Any
 Ceiling Thickness (with Frame): 1" Max



[Click for Full Specification Details](#)

Fixture	Cylinder and Reflector Finish	Flange Ring Finish	Beam Spread	Color Temperature	Control	Optional Frames
Adjustable Pull Down Round Flanged	LRLD2567	White W Black B	20° Spot -B20 40° Flood -B40 75° Very Wide Flood -B75	90 CRI 2700K (90 CRI) -T27 3000K (90 CRI) -T30 3500K (90 CRI) -T35	Triac Dimming (120V) 0-10V Dimming (1%) (120V/277V) Athena Wireless Node (120V) Athena Wireless Node Occupancy Sensor (120V) UniSense - Remotely Mounted Motion/Photosensor (120V) UniSense - Remotely Mounted Motion/Photosensor Casambi Wireless Dimming BubbyNet Wireless System	Blank UE-D10P1 -AWN -AWN-OCC -SUN-RMT¹ -SUN-RMT-1227² -DCSM¹ -DBNT¹

¹ Special Order.
² (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

NOTES: Consult factory for emergency battery options.
 For commercial applications with 1/2" Pipe or Flex-Conduit (**LITON# PCT031**) Fitting Adaptor should be used. Consult Factory.
 LRLD2567 and LHLD25-FRM for (-L14) 1200lm is available with LFB2012 for Fire-Rated Application.