TYPE PROJECT

CATALOG#

LRLD25: 2.5" P·SERIES

RECESSED LED - ROUND FLANGED, 1000LM - 2400LM (15W-30W)

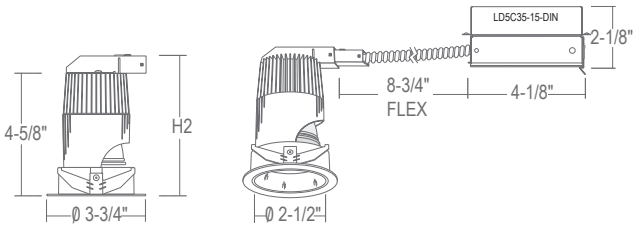

-L09: H2: 5-1/4"" **-L14:** H2: 6-1/2"

Ceiling Cut-Out: 3-1/16" Max
Ceiling Thickness (Frameless): 3" Max
Ceiling Thickness (with Frame): 1" Max

LRLD2521
Downlight

LRLD2521J
25° Adj. Accent

LRLD2571
40° Adj. Accent

US Assembled · Quickship · Damp Location · Wet

Ambient Light · Downlight · 1-Accessory · Sloped Ceiling

Dedicated LED · 120V · 277V · Intertek

Title 24 JA-8 · Energy Star · Motion/Daylight Sensor

- 1000lm (15W), 1400lm (22W) and 2400lm (30W) lumen packages
- Equivalent to 75W MR16 Output
- Ideal where space is limited and energy savings is important
- Field Replaceable Beam Spread Optics
- Lockable Tilt
- 0.5% for 1000lm (-L09), 5% dimming for 1400lm (-L14) and 2400lm (-L24)

ORDERING : LRLD2521SW-L09-B25-T27UE-DUN-WL

Click for Full Specification Details

LRLD2521

Fixture | Reflector Finish/ Material | Trim Ring Finish | Lumens | Beam Spread | Color Temp | Control | Rating / Accessories | Optional Frames

Fixture

Downlight	**LRLD2521**
25° Adj. Accent	**LRLD2521J**
40° Adj. Accent	**LRLD2571**

Reflector Finish/Material[9]

Matte White/DC	**W**
Specular Clear/PC	**C**
Specular Black/PC	**B**
Satin Haze/DC	**S**
Specular Graphite/PC	**RP**
Matte Gold/PC	**MG**

Trim Ring Finish

White	**W**
Black	**B**

Lumens

1000lm (15W)	**-L09**[2,7]
1400lm (22W)	**-L14**[4,7]
2400lm (30W)	**-L24**[4,6]

Beam Spread

10° Narrow Spot	**-B10**[1]
25° Narrow Flood	**-B25**
35° Flood	**-B35**
60° Wide Flood	**-B60**[5]

Color Temperature

3000K (90 CRI)	**Blank**
3000K (97 CRI)	**-C97**
1700K (90 CRI)	**-T17**
2700K (90 CRI)	**-T27**
2700K (97 CRI)	**-T27-C97**
3500K (90 CRI)	**-T35**
4000K (90 CRI)	**-T40**
3000K - 1800K Warm Dimming	**-TWD**[2,4]

Control

Triac Dimming (120V)	**Blank**
0-10V Dimming (120V/277V)	**UE-D10**
UniDim™ 0-10V, ELV, Triac Dimming (120V/277V)	**UE-DUN**
0-10V 1% Dimming (120V/277V)	**UE-D10P1**
Lutron EcoSystem Dimming (1%)	**-DEC**[8]
DALI Dimming	**-DLI**[8]
Athena Wireless Node (120V)	**-AWN**
Athena Wireless Node Occupancy Sensor (120V)	**-AWN-OCC**
UniSense - Remotely Mounted Motion/Photosensor (120V)	**-SUN-RMT**[10]
UniSense - Remotely Mounted Motion/Photosensor	**-SUN-RMT-1227**[10]
Casambi Wireless Dimming	**-DCSM**[8]
BubblyNet Wireless System	**-DBNT**[8]

Rating

None	**Blank**
Airtight Lensed (Wet Location)	**-WL**[3]
4" JBox (Chicago Plenum)	**-JB-CHP**

Accessories

COLOR LENS

Clear Lens	**/L38**
Red Lens	**/L39**
Yellow Lens	**/L40**
Blue Lens	**/L41**
Amber Lens	**/L42**
Green Lens	**/L43**
Daylight Blue Lens	**/L44**
Violet Blue Lens	**/L46**

FILTER LENS

Black Hex Cell Louver	**/LL16-HD-B**
Frosted Soft Focus	**/L49**
Ultra Violet Filter	**/L50UV**
Micro Prismatic Spread Lens	**/L53**
Linear Spread Lens	**/L55**

[1] Not field changeable.
[2] Warm Dimming (-TWD) only available for 1000lm (-L09) lumen package.
[3] Airtight Lensed (Wet Location) (-WL) not available for LRLD2571.
[4] (-TWD)Warming Dimming, (-L14) 1400lm and (-L24) 2400lm are not available for both LHLD25IC-FRM (IC) or LHFRLD25 (Fire-Rated)
[5] Achieved through a filter at 60º aperture level.
[6] (-B10) Beam Spread, (-T17) 1700K color temperature, (-DEC) Lutron EcoSystem, and (-TWD) Warm Dimming options are not available for 2400lm (-L24) lumen package.
[7] (-L09), and (-L14) lumen packages with 120V/277V UniDim™ (UE-DUN) driver option are Energy Star Certified.
[8] Special order, minimum order. Extended lead time may apply. Consult Factory. Consult factory for emergency battery options.
[9] **DC:** Diecast (Paint applied finish), **PC:** Polycarbonate (Vacuum metalized finish).
[10] (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

LRLD2521, LRLD2521J, LRLD2571 and LHQLD25-FRM for (-L14) 1200lm is available with LFB2012 for Fire-Rated Application.
NOTE: For commercial applications with 1/2" Pipe or Flex-Conduit (LITON# PCT031) Fitting Adaptor should be used. Consult Fac-